




REFERENCES & SYSTEM DESCRIPTIONS OF ZINGA® APPLICATIONS IN THE FOOD INDUSTRY AND RELEVANT STRUCTURES

Zingametall bvba - Rozenstraat 4 - 9810 Eke – Belgium

Tel: +32/9/385.68.81 - Fax: +32/9/385.58.69

E-mail: zingametall@zinga.be - www.zinga.be





UNIQUE CHARACTERISTICS AND ADVANTAGES OF ZINGA

ZINGA is in fact much more effective than any other existing anti-corrosion system. This efficiency is based on a number of unique characteristics and advantages, as explained in the following summary.

1. ZINGA protects the metal against rust in two ways: an active, cathodic, galvanic protection due to its high zinc content and a passive barrier protection due to the zinc salt on top of the surface, and due to the binder in ZINGA that reduces the disintegration of the zinc.
2. The application of ZINGA is very easy. It can be painted onto the surface with a brush, a roll or painting gloves. It can also be sprayed with a pistol, and it can be applied in a bath. There is no need for sophisticated equipment that can only be found in a workshop. ZINGA can be applied on site, even by non-professionals.
3. ZINGA can be applied in a wide range of weather conditions. ZINGA can be applied on a damp surface (but not on drops of water). Humidity can even intensify the cathodic action and accelerate the formation of the zinc salts on the surfaces that offer the barrier protection. ZINGA can be applied at very high or low temperatures (up to 45° C or 113° F and down to -15° C or 5° F).
4. ZINGA can be applied on a non-contaminated rusty surface. Once the loose particles have been removed, ZINGA will attach itself perfectly onto the surface.
5. The surface preparation can be reduced to a minimum: the metal must be clean (free from dirt, grease, oil, salts, paint, and mill scale) and rough. It is not always necessary to grit-blast the metal first.
 - Application on bare metal: Mostly grit-blasting is necessary, but in some cases the substrate already has the required roughness degree due to former grit-blasting or due to corrosion.
 - Application on top of hot-dip galvanisation: Old and corroded hot-dip only needs to be cleaned and already has the required roughness degree. New hot-dip can be treated in order to obtain the required roughness.
 - Application on an old ZINGA layer: When ZINGA is applied on an old ZINGA layer, then the surface just needs to be cleaned.
6. ZINGA is always applied under ambient temperatures, so that delicate metal structures cannot be deformed. Even dipping is done in ambient temperature. No energy is wasted to warm up ZINGA, which is necessary for hot-dip galvanisation wherefore you need temperatures up to 620 °C.
7. ZINGA has a quick drying time. A new layer of ZINGA can be applied after 1 hour. Topcoats can be applied after 4 to 24 hours, depending on layer thickness and atmospheric conditions.
8. ZINGA does not peel off and is not brittle. In case of mechanical damage the ZINGA layer will be compressed or squashed, but it will not crack due to its flexibility.
9. One of the most decisive advantages of using ZINGA is that the zingalisation system can be recharged. Each new layer of ZINGA blends perfectly with the previous one. Additional layers all blend to one single, homogeneous ZINGA layer. There is no risk for accumulation of layers that are different in structure, which could cause peeling off. You cannot distinct different layers, as is the case with galvanising by hot-dip. Moreover, this capacity of recharging reduces the surface preparation to an absolute minimum. Other coating systems, for instance with paints, demand an elaborate and often expensive surface preparation before the application of a new layer.



10. This property of recharging can be of use if you still have to do some drilling or welding on the surface, or if the structures still have to be transported. In that case the first layer is meant as a primer. It can intercept possible damages. Even welding is possible on top of ZINGA. Afterwards, the final layer of ZINGA can be applied and local damages can be repaired. The new layer makes the former layer liquid again and the result is one homogeneous ZINGA layer. When there is no need to recoat the whole structure, you can apply a small quantity of ZINGA on the damaged spots and the whole structure is free from rust again. Repairs will be invisible after a certain time.
11. Structures that have been metallised or galvanised by hot-dip will begin to rust after a certain period. Such worn-out and damaged structures can also be recharged by ZINGA.
12. ZINGA has a zinc content of 96 % in the dry layer. The zinc is pure to 99.995 %. In order to obtain a real cathodic protection you need at least 92 % of zinc in the dry layer. That is scientifically proven. The so-called zinc-rich paints do not meet this condition.
13. Moreover ZINGA is based on protected zinc. The zinc particles are protected by a special resin that allows the formation of the galvanic couple, but that also gives an additional protection. Therefore protection with ZINGA is a superior alternative for galvanisation by hot-dip.
14. The zinc granules have been specially shaped so that they have a bigger contact surface through which they can attach to one another. For your information: the zinc used in ZINGA is made by the Belgian company Umicore, well-known all over the world, since they are the number 1 manufacturer in the world of these atomised zinc dust pigments, further electronically prepared for Zingametall. This atomisation process provides unique qualities and a very high zinc purity. This is also one of the reasons why ZINGA does not have one single true competitor in the world.
15. ZINGA is uniquely characterised by the fact that it sacrifices itself or that it is “consumed”. Together with the quality of not peeling off, this results in the depletion of each applied layer: between 2 – 15 µm per year depending on the environmental conditions. This is an important factor in monitoring the application and the evaluation of the lifetime of the system. Hence, it is a true benefit in terms of maintenance and budget scheduling.
16. With ZINGA, a customized and personal solution can be offered. Customers are not always in need of a long term corrosion protection or don't have the budget for it. In case of a limited budget and desired protection time of for instance only 5 – 7 years, the layer thickness can be reduced and this will have an effect on the price per m². In other words: ZINGA is the most “flexible” customized solution.
17. ZINGA can be topcoated by a large number of compatible paints. Such duplex systems will more than double the lifetime of ZINGA. In order to reinforce the duplex qualities of the ZINGA system a topcoat can be applied. We can supply you with different compatible paints: epoxy, polyurethane, vinyl and especially developed micaceous iron oxides, the so-called M.I.O.'s. These paints can be applied directly on ZINGA. The lifetime of a duplex system, which is the combination of an active and a passive protection system, is not equal to the sum of the lifetimes of these systems, but it is more than double of this sum.
18. These topcoats can be bought from the same supplier. You just need to speak to one contact person and only that one company can be held responsible for the total application.
19. ZINGA is composed of non-toxic elements according to European Standards and can be used in contact with potable water (BS 6920).
20. ZINGA is heat resistant up to 120° C. ZINGA can also intercept occasional and short thermal shocks up to 150° C.



21. ZINGA has fire retardant properties. Moreover, ZINGA is used as primer in the fire resistant system Euroflam: ZINGA, topcoated with the intumescent paint Aquaflam EX and the finishing layer Alkyd RS. This system is the most unique fire protection system in the world. The intumescent paint Aquaflam EX foams up when it is heated. The foam forms an isolation barrier and protects the steel from heat and flames.
22. a) ZINGA has an unlimited pot and shelf life.
b) ZINGA is a one component coating.



OVERVIEW OF MAIN REPORTS OF TESTS PERFORMED WITH ZINGA

to download the actual reports, please visit www.zinga.eu

ZINGA quality label

SGS Systems & Services Certification (Belgium)

Certificate ISO 9001 for quality management

The company Zingametall has implemented a quality management system that is based on the standard ISO 9001. Hereby we commit ourselves to strive for continuous improvement and customers' satisfaction.

(http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=46486)

British Board of Agrément (BBA) (United Kingdom)

BBA certificate n° 03/4047

After thorough evaluation (effect on water quality, fire propagation, surface spread of flame, welding, resistance to abrasion, weathering, etc.) ZINGA received the approval from the BBA, which is the UK's major approval body for new construction products and installers. The BBA, in collaboration with SGS Coating Services, carries out regular inspections of the manufacturing process of ZINGA. This includes all the procedures involved with the production and the control of the delivered raw materials as well as of the quality of the final product. Traceability of the delivered product is assured by means of a specimen of each production batch.

(<http://www.bbacerts.co.uk/>)

Australian Paint Approval Scheme (APAS) (Australia)

APAS certificate n° 0180

After a thorough research of test reports, applications in Australia and a visit to the factory in Belgium, Zingametall BVBA was acknowledged as a recognized manufacturer by the APAS.

"APAS (Australian Paint Approval Scheme) is the largest and most widely recognized paint scheme in the world".

(<http://www.apas.gov.au/index.asp>)

NATO Approval (International)

Manufacturer's n°: BE0421689088; NSN for ZINGA: 8030131137027

In 1989 Zingametall received a Manufacturer's card and a NATO Stock Number for ZINGA. A NATO Stock Number is recognised as a stock number of the armies of the member states. Every product that is accepted by the NATO can be used by all the armies of the NATO member states without the necessity or obligation to test the product again.

(http://www.nato.int/structur/ac/135/ncs_guide/english/e_1-6-5.htm)

Engineers India Limited (India)

Based on reports, test certificates from independent European and Chinese test organisations combined with other information documents, the 'Engineers India Limited' sees ZINGA as an effective protective coating system in various corrosive environments.

They state that ZINGA would be a 'better replacement' for inorganic zinc silicates and hot dip galvanisation.

(<http://engineersindia.eil.co.in/>)

London Underground (United Kingdom)

ZINGA has been accepted by the 'London Underground' for use as a protective system on ferrous metals and as alternative to hot-dip galvanisation or metallisation. They sent us this Certificate after extensive study of existing documents in combination with doing tests on ZINGA's behaviour in contact with fire themselves.

(<http://www.tfl.gov.uk/corporate/modesoftransport/1574.aspx>)



ZINGA galvanic protection

ISO 12944-6 (COT nv) (Netherlands)

Test according to the ISO 12944-6 standard

ZINGA applied in 2 layers of each 90µm DFT got the classification:

C5I-High/C5M-High

and Im2-Medium/Im3-Medium.

ZINGA applied in 2 layers of each 60µm DFT got the classification:

C5I-Medium/C5M-Medium or C4-High.

and Im2-Medium/Im3-Medium.

NORSOK Certificate (COT nv) (Netherlands)

Test according to the NORSOK standard M-501, rev. 5, system 7

ZINGA has passed the 4200 hours seawater immersion test and the 4200 hours cyclic test without any formation of rust, blisters, cracks, flakes or cathodic disbondment. The pull-off adhesion test on ZINGA resulted in values of more than 7MPa.

Det Norske Veritas (DNV) (Norway)

Ballast Tank test

ZINGA was applied on blast-cleaned test panels that were placed in a ballast tank filled with sea water with wave movement and cyclic heating. Other test panels were placed in a condensation chamber.

No corrosion of the steel substrate could be demonstrated. Based on the results of the testing, ZINGA meets the requirements of a B3 classification. In the report is stated that ZINGA has a beneficial corrosion protective performance.

Field test (Sintef) (Norway)

ZINGA duplex system compared to TSZ/TSA

This report gives the field test results of visual inspection of the panels after 5 years marine atmospheric exposure started in September 2002 and terminated in May 2008. The system that was tested was ZINGA + Alufer N + Alufer WR and performed excellently compared to systems based on TSZ/TSA (metallisation).

Bodycote Materials Testing (United Kingdom)

Cathodic Disbondment test

ZINGA applied at 60 µm DFT was exposed during 26 weeks at -1,0 volt. The results was no cathodic disbondment at all.

Potential Performance Test (Netherlands)

Determining the galvanic protection

The results showed active behavior of this film (-1114mV using Cu/CuSO₄). This means that it will provide cathodic protection to damaged, uncoated or improperly coated metal surfaces.

Trial protection of Crevices on Młyńskie bridges in Wrocław (Poland)

Crevice Corrosion field test

On the basis of an agreement between IBDiM in Warsaw and The Administration of Roads and Local Services in Wrocław trial application tests of various systems for the protection of crevices on Młyńskie Bridges in Wrocław were conducted.

Upon this test ZINGA was approved for use on bridges in Poland.

ZINGA in comparison with hot-dip galvanisation

University of Ghent (RUG) (Belgium)

Measurement of the short circuit current flow of ZINGA in comparison to hot-dip

In this test (based on electro-chemical measurements) is demonstrated that ZINGA offers cathodic protection equal to that of hot-dip.

BNF Fulmer Research Centre (United Kingdom)

Electrochemical tests on ZINGA in comparison to hot-dip

The open circuit voltage and galvanic current between the galvanising layers and the bare steel were measured. The conclusion of the report is that ZINGA offers galvanic protection to steel comparable to that offered by hot-dip galvanisation. In other words: a layer of ZINGA is a completely metallic layer exactly like a hot-dip galvanising layer, and will behave as such in all aspects. Moreover, this test demonstrated that the corrosion rate of ZINGA is 1/3 of the corrosion rate of hot-dip galvanising under similar (immersion) conditions.

Forschungs- und Materialprüfungsanstalt Baden-Württemberg (FMPA) (Germany)

Different tests on the efficiency of ZINGA in comparison to hot-dip: potential measurement and short circuit current measurement

In this test is demonstrated that the electrochemical behaviour of ZINGA is similar to that of a hot-dip layer.

South African Bureau of Standards (SABS) (South Africa)

Salt spray test on ZINGA in comparison to hot-dip (loss in weight)

In this test is demonstrated that the loss in weight of ZINGA is 1/10 of the loss in weight of hot-dip galvanising after a 400 hours salt spray test. The layer thickness of ZINGA diminishes because ZINGA is being consumed, contrary to a paint that will start to peel off after a certain period of time. This illustrates the fundamental difference between a paint and a galvanising system.

Direction Départementale de l'Équipement – Service Maritime de la Vendée (France)

Field test on the efficiency of ZINGA in comparison with hot-dip on sea buoys

Two buoys (one treated with ZINGA, the other one hot-dip galvanised) have floated in the Atlantic Ocean for four years. After those four years, the buoy treated with ZINGA showed no trace of rust while the hot-dip galvanised buoy was severely corroded in several places.

ZINGA on rebars

Steel Authority of India (India)

Measurement of corrosion rate by salt spray and immersion tests

A comparison was made between uncoated steel rebars, fusion bonded epoxy coated rebars (FBEC), hot-dip galvanised rebars (HDG) and zinganised rebars (ZINGA). The corrosion rate per year was measured after immersion and salt spray. This test demonstrated several advantages of ZINGA: the greater degree of galvanic protection, the lower sacrificial zinc consumption due to the dispersion of zinc dust in the binder and the additional barrier protection created by the binder.

→ ZINGA > FBEC > HDG > Uncoated

Jadavpur University (India)

Different tests on the efficiency of ZINGA in comparison with other coatings on rebars

A comparison was made between uncoated steel (Mild steel and Stainless steel) rebars, fusion bonded epoxy coated rebars (FBEC), hot-dip galvanised rebars (HDG) and zinganised rebars (ZINGA). The salt spray test pointed out that the zinganised rebars have a corrosion resistance that is about 2 times higher than that of hot-dip galvanised rebars. ZINGA is also least susceptible for stress corrosion cracking.

→ in NACE solution: ZINGA > HDG > FBEC > Stainless steel > Mild steel

Amirkabir University Poly Technic Tehran (Iran)

Different tests on the efficiency of ZINGA in comparison with uncoated rebars

The zinganised rebars passed the 500 hours salt spray test without formation of rust, peeling or blistering, not even in places where the coating was mechanically damaged. The rebars that were not zinganised were heavily corroded.

Bend test at B-Holding (Belgian Railways)

Bend test of ZINGA in layer thickness around 70µm DFT over different diameters

The zingانىsed plates were bended over different diameters (ISO 1519).

ZINGA showed no traces of cracks when the plate was bended over diameter 20mm. If bended over smaller diameters (down to 10mm), cracks were visible, but ZINGA didn't come off which is one of the biggest differences with paints and hot-dip galvanisation.

University of Ghent (Belgium)

Pull-out test on zingانىsed rebars

A pull-out test was performed to evaluate the influence of a ZINGA layer on the bond strength of the rebar with the concrete. The conclusion was that coating with ZINGA does not negatively affect this.

Adherence of concrete to zingانىsed rebars at B-Holding (Belgian Railways)

Adherence of concrete to zingانىsed rebars

The conclusion of the report is:

It is clearly more difficult to cleave the rebar bloc containing the steel rod protected by Zinga. The adherence of the concrete to the steel rod is better. The actual cleavage happens in the concrete.

Other tests on ZINGA

❖ Reports concerning health

National Institute of Public Health (Poland)

Use of ZINGA on the inside of potable water storage tanks

Conclusion is:

ZINGA is approved for covering the inner surfaces of steel containers designed to store potable water.

Water regulations Advisory Scheme (United Kingdom)

Test on the influence of ZINGA on water quality

These tests were performed according to the standard BS 6920 to determine whether or not the quality of potable water is affected when it is in contact with a ZINGA layer. The water was analysed on taste, appearance, growth of micro organisms, extraction of harmful substances and extraction of metals. The obtained results complied with the requirements and ZINGA was found suitable for contact with potable water.

EDF - Gaz De France (France)

Toxicological advise

A positive toxicological advise was written and distributed in the company EDF-Gaz De France concerning the national use of ZINGA.

❖ Reports concerning reliquification

University of Ghent (Belgium)

Test on how successive ZINGA layers blend with each other

This test demonstrates that a newly applied ZINGA layer makes the former layer liquid again so that both layers blend together to one single homogeneous layer. The new layer recharges the old one. The ZINGA film galvanising system is very easy to maintain and to recharge: there is no need for grit-blasting, contrary to the surface preparation that is required when a traditional paint has been used.

Stangers Consulting Engineers and Scientists (United Kingdom)

Tests a.o. how successive ZINGA layers blend with each other

ZINGA is easy to apply by brush and resoftens caked Zinga or dry Zinga films as claimed by the manufacturer. This property enables ZINGA to be built up into thick composite layers avoiding the discrete films achieved with conventional coatings.

Their end conclusion was: It is evident that the product has special properties which place it, as far as we know, into a unique category.

❖ Report on the surface spread of flames

SGS Yarsley Technical Services (United Kingdom)

Test on the fire propagation on ZINGA

The results of the test according to the BS 476: part 6 show that ZINGA has a class 0 surface. ZINGA did not ignite during exposure to heating.

❖ Reports concerning friction coefficient

KTA-TATOR (United States of America)

Test on the friction coefficient of ZINGA

The slip coefficient of ZINGA applied at 100µm DFT is 0,52.

China National Construction Steel Quality Supervision and Test Center (China)

Test on the friction coefficient of ZINGA

The slip coefficient of ZINGA applied on steel plates and bolts, ranges from 0,54 to 0,67.

❖ Report concerning weldability

University of Ghent (Belgium)

Test on the influence of ZINGA on welding steel

A set of 3 x 2 plates, covered with a layer of Zinga, the thickness of which was respectively 15µm DFT, 40µm DFT and 60 µm DFT.

After a polymerisation period of seven days the two plates covered with the same coating thickness were welded together by hand.

The conclusion was:

None of the 3 specimens shows any deficiency, neither in the welding seams nor in the steel itself.



OVERVIEW AVAILABLE REFERENCES

Please find hereafter an overview of our references. Some of the references are enclosed. All other mentioned references can be obtained upon request.

Reference structure:

First letter: ISO letter of the country of the ZINGA application
Following letters: Theme references

Example: FI-AG-FO- Cattle and Pigfarm

FI: Finland (country)
AG: Agriculture (theme)
FO: Food (theme)
Cattle and Pigfarm: Title of the reference

AG: Agriculture

1. COW SHED BEAMS - BELARUS	BY-AG-Cow Shed
2. DAIRY FARM VITEBSK - BELARUS	BY-AG-Dairy farm
3. MARTENS DIRK – AGRICULTURAL MACHINERY - BELGIUM	BE-AG-OL-TE-Martens
4. CATTLE- AND PIGFARM - FINLAND	FI-AG-FO-HD-Cattle and Pigfarm
5. GRAIN SILOS NADOR CEREALES – MOROCCO	MA-AG-HD-TA-Grain Silos Nador Cereales
6. YUZHNY GREENHOUSE FARM - RUSSIA	RU-AG-HD-Yuzhny
7. KENSINGTON PALACE SUNKEN GARDENS – UNITED KINGDOM	UK-AG-AM-CI-TP-Kensington Palace Sunken Gardens
8. EDEN GREENHOUSE DOME – UNITED KINGDOM	UK-AG-HD-HT-TP-Eden

AL: Alu ZM

1. FENCE SUNNY EUROPE – BELGIUM	BE-AL-CR-HD-Fence Sunny Europe
2. RENOVATION SCHOOL SAINT-JOSEPH – LEVIS QUEBEC	CA-AL-AM-HD-Saint-Joseph
3. SEOUL AIR CONDITIONING – SOUTH KOREA	KR-AL-PI-Seoul Air Conditioning
4. HIGHWAY DEPARTMENT - THAILAND	TH-AL-Highway Department

AM: Historical and recreational buildings

1. MUSEUM HOTEL IN WENDAKE - QUEBEC	CA-AM-CO-Wendake
2. BIRD'S NEST - CHINA	CN-AM-Bird's Nest
3. GENT - KIOSK – BELGIUM	BE-AM-CO-OL-Gent Kiosk
4. METRO – MINSK – BELARUS	BY-AM-LT-TC-Metro
5. RENOVATION SCHOOL SAINT-JOSEPH – LEVIS QUEBEC	CA-AL-AM-HD-Saint-Joseph
6. PARLIAMENT BUILDING - QUEBEC	CA-AM-Parliament Building Quebec
7. EGLISE SAINTE THERESE – CHURCH – CANADA	CA-AM-Eglise Sainte Thérèse
8. WALT DISNEY – HONG KONG	CN-AM-TE-Walt Disney HK
9. NATIONAL GRAND THEATRE BEIJING - CHINA	CN-AM-MA-Theatre Beijing
10. OHENE DJAN SPORT STADIUM LIGHT POLES - GHANA	GH-AM-HD-PY-OheneDjanStadium
11. KENSINGTON PALACE SUNKEN GARDENS – UNITED KINGDOM	UK-AG-AM-CI-TP-Kensington Palace Sunken Gardens
12. ROYAL TRAIN SHED – UNITED KINGDOM	UK-AM-CI-RoyalTrainShed
13. ZIMBALI CONDOMINIUM – WORK OF ART – SOUTH AFRICA	ZA-AM-Zim Condomin

AP: Airports

1. GUANGZOU NEW BAIYUN AIRPORT - CHINA	CN-AP-HD-Baiyun
2. DÜSSELDORF - AIRPORT - GERMANY	DE-AP-CO-HD-OL-TE-Düss.Airport
3. MUMBAI DOMESTIC AIRPORT - INDIA	IN-AP-Mumbai Domestic airport
4. SUVARNABHUMI – AIRPORT - THAILAND	TH-AP-DI-SuvarnabhumiAirport

**AR: Armies and military organisations**

1.	NATO – NATO PUMP STATIONS - BELGIUM	BE-AR-OL-PI-TE-NATO
2.	BELGIAN ARMY - NAVY SHIPS AND ANTENNA - BELGIUM	BE-AR-OL-PY-SH-Belgian Army
3.	USNS ZEUS CABLESHIP - USA	CA-AR-MA-HD-SH-USNS Zeus Cablesheet
4.	POLES ARMY TENTS - UNITED KINGDOM	UK-AR-DI-Poles Army Tents
5.	US ARMY - ARMY VEHICLES - UNITED STATES OF AMERICA	US-AR-HD-OL-TE-TR-US Army
6.	MISSISSIPPI DEPARTMENT OF TRANSPORTATION BILOXI BRIDGE – UNITED STATES OF AMERICA	US-AR-BR-TE-MDOT
7.	NEXRAD TOWER – UNITED STATES OF AMERICA	US-AR-PY-Nexrad Tower

AS: Automatic spraying lines

8.	REBAR SPRAYING INSTALLATION TEHRAN HARA - IRAN	IR-AS-RE-AutomSprayLine
----	--	-------------------------

AZ: Aquazinga

1.	FLOREAC – COAL FUNNEL – BELGIUM	BE-AZ-HT-OL-Floreac
2.	CARSID - BELGIUM	BE-AZ-HT-OL-TE-Carsid
3.	J.M. INDUSTRIAL – RACKS, METAL EQUIPMENT AND STRUCTURES IN BRICK MANUFACTURING FACTORIES- BELGIUM	BE-AZ-CE-HU-OL-TE-JM Ind
4.	YUEHAI PASSAGE TRAIN FERRY PIER TERMINAL - CHINA	CN-AZ-MA-RW-YuehaiTrainFerry
5.	SULTAM – CHIMNEY - ISRAEL	IL-AZ-HT-OL-Sultam
6.	DERBY – TURBINE EXHAUST STACKS - UNITED KINGDOM	UK-AZ-HT-OL-TE-Derby
7.	PORT ELISABETH ELECTRICITY DEPARTMENT - FUEL TANKS AND EXHAUST – SOUTH AFRICA	ZA-AZ-HT-TA-Port.El

BR: Bridges

1.	MOLISSON STREET BRIDGE- AUSTRALIA	AU-BR-Molisson Street Bridge
2.	QUEENSLAND RAILWAY BRIDGES - AUSTRALIA	AU-BR-RW-QR Railway Bridges
3.	REYNELLA BRIDGE - AUSTRALIA	AU-BR-TC-Reynella Bridge
4.	EUROPEAN TECHNICAL ASSOCIATION FOR PROTECTIVE COATINGS - BELGIUM	BE-BR-OL-TE-ETAPC
5.	DE BRANDT – FENDER CONSTRUCTIONS - BELGIUM	BE-BR-IM-OL-De Brandt
6.	MELLE BRIDGE - BELGIUM	BE-BR-OL-TC-Melle Bridge
7.	GENT - KEIZER BRIDGE - BELGIUM	BE-BR-CR-OL-Keizer Bridge
8.	WEGENFONDS BRIDGE - BELGIUM	BE-BR-OL-Wegenfonds
9.	RUMST BRIDGE – BELGIUM	BE-BR-Rumst Bridge
10.	RAILWAY OFFICE - BENIN	BJ-BR-OL-RW-Chemins Fer
11.	DR QUESNELL BRIDGE EDMONTON CANADA	CA-BR-Dr Quesnell Bridge Edmonton
12.	CONFEDERATION BRIDGE - CANADA	CA-BR-OL-Confederatie
13.	BC FERRY TERMINALS - CANADA	CA-BR-MA-OL-TE-BC Ferry
14.	OVERLANDER BRIDGE - CANADA	CA-BR-OL-TE-Overlander
15.	HANGZHOU BAY BRIDGE - CHINA	CN-BR-RE-Hangzhou Bay
16.	BLANICE RIVER BRIDGE – CZECH REPUBLIC	CZ-BR-OL-Blanice
17.	EL SALAAM BRIDGE - EGYPT	EG-BR-MA-PI-TE-Salaam
18.	AUTOMATED PARKING SYSTEMS SILODAM AMSTERDAM – NETHERLANDS	NL-BR-CO-Automated Parking Systems Silodam Amsterdam
19.	KALVOYA BRIDGE - NORWAY	NO-BR-MA-OL-TE-Kalvoya
20.	BRIDGE GIRDERS – POLAND	PL-BR-Girders
21.	FOOTBRIDGES AND PROTECTION BARRIERS BYDGOSZEZ - POLAND	PL-BR-CR-Bydgoszez
22.	RENOVATION OF THE SIERKIERKOWSKI BRIDGE IN WARSAW, NATIONAL ROAD- POLAND	PL-BR-CR-Sierkierkowski Bridge



23.	ST PAUL – JETTY – REUNION	RE-BR-MA-St. Paul
24.	TEMPVAR BRASOV BRIDGE – ROMANIA	RO-BR-PI-Tempvar Brasov Bridge
25.	NEWARK MARINA BRIDGE - UNITED KINGDOM	UK-BR-OL-Newark Mar.
26.	TAXI BERTH BRIDGE IN CARDIFF BAY - UNITED KINGDOM	UK-BR-Taxi Berth
27.	MISSISSIPPI DEPARTMENT OF TRANSPORTATION BILOXI BRIDGE – UNITED STATES OF AMERICA	US-AR-BR-TE-MDOT

BW: Breweries

1.	KBL LTD – BREWERY - BOTSWANA	BW-BW-KBL
----	------------------------------	-----------

CE: Cement factories and brick manufacturing companies

1.	HOLCIM GRANULATS - CEMENT FACTORY - BELGIUM	BE-CE-OL-TE-Holcim
2.	J.M. INDUSTRIAL – RACKS, METAL EQUIPMENT AND STRUCTURES IN BRICK MANUFACTURING FACTORIES- BELGIUM	BE-AZ-CE-HU-OL-TE-JM Ind.
3.	PAESEN - CONCRETE MILL - BELGIUM	BE-CE-TA-Paesen
4.	SCHWENK – CEMENT FACTORY - GERMANY	DE-CE-OL-TE-Schwenk
5.	SIAM CEMENT - THAILAND	TH-CE-SiamCement
6.	THE INFRASTRUCTURE OF THE COMPANY LAFARGE – SOUTH AFRICA	ZA-CE-OL-Lafarge

CI: Cast iron

1.	DULLE GRIET - CANNON – BELGIUM	BE-CI-TC-Dulle Griet
2.	DE GIEY – THE FENCE OF THE CASTLE - BELGIUM	BE-CI-CR-OL-De Giey
3.	KLEIN KASTEELKEN – CAST IRON FENCE - BELGIUM	BE-CI-CR-OL-TC-Klein Kasteelken
4.	TEATRO MUNICIPAL - BRAZIL	BR-CI-CO-TC-Teatro
5.	FOUNTAINS IN PEOPLE'S PARK - DUBLIN – IRELAND	IE-CI-Fountains
6.	KENSINGTON PALACE SUNKEN GARDENS – UNITED KINGDOM	UK-AG-AM-CI-TP-Kensington Palace Sunken Gardens
7.	ROYAL TRAIN SHED – UNITED KINGDOM	UK-AM-CI-RoyalTrainShed

CN: Cranes

1.	ANTWERP - PORT CRANES – BELGIUM	BE-CN-OL-Antwerp Port Cranes
2.	HARBOUR OF GENK – BELGIUM	BE-CN-OL-TE-KHG
3.	MENGE – THE TOWER CRANE OF THE COMPANY MENGE, SPECIALISED IN RENOVATION OF CHIMNEYS - BELGIUM	BE-CN-Menge
4.	PACIFIC GRAIN ELEVATOR - CANADA	CA-CN-MA-Pacific Grain Elevator
5.	OFFICE TOGOLAIS DES PHOSPHATES PHOSPHATE MINE OFFSHORE - CHARGING CRANES - TOGO	TG-CN-MA-OL-PE-Off. Togolais

CO: Construction and engineering

1.	GENT - KIOSK – BELGIUM	BE-AM-CO-OL-Gent Kiosk
2.	DENDERMONDE - BACOB BANK – BELGIUM	BE-CO-OL-Bacob
3.	CNO – A COOLING TOWER - BELGIUM	BE-CO-OL-CNO
4.	BLANKENBERGE - PARAVENT – BELGIUM	BE-CO-CR-MA-OL-Paravent
5.	DUFERCO – A SHELTER – BELGIUM	BE-CO-Duferco
6.	LAFAUT – PRIVATE HOME FAMILY JOY – BELGIUM	BE-CO-Lafaut
7.	SE INDUSTRIES - CONSTRUCTION AND ENGINEERING – BELGIUM	BE-CO-OL-SE Industries
8.	TRACTEBEL – POWER STATION - BELGIUM	BE-CO-EL-OL-TE-Tractebel



9.	METAL CONSTRUCTIONS – VAN HEE - BELGIUM	BE-CO-Van Hee
10.	MAKO BETON - RACKS - BELGIUM	BE-CO-Mako Beton
11.	OPMETAAL - CHASSIS - BELGIUM	BE-CO-Opmetaal
12.	TEATRO MUNICIPAL - BRAZIL	BR-CI-CO-TC-Teatro
13.	ROHR – BUILDING INDUSTRY (SCAFFOLDING, TUBES, ...) - BRAZIL	BR-CO-Rohr
14.	TECHNICAL FAIR - BULGARIA	BG-CO-TE-TechnFair
15.	MUSEUM HOTEL IN WENDAKE - QUEBEC	CA-AM-CO-Wendake
16.	METRO VANCOUVER SKYTRAIN – CANADA	CA-CO-Metro Vancouver Skytrain
17.	DÜSSELDORF - AIRPORT - GERMANY	DE-AP-CO-HD-OL-TE-Düss.Airport
18.	SCHALKE 04 – FOOTBALL STADION - GERMANY	DE-CO-Schalke
19.	ZDF TELEVISION BROADCASTING STATION – CONSTRUCTION -GERMANY	DE-CO-OL-ZDF
20.	JEAN D'HUART - STEEL SUPPLIER AND APPLICATOR - FRANCE	FR-CO-D'Huart
21.	LE MANS CENTRE OF SPORTS AND CULTURE STEEL CONSTRUCTION FRANCE	FR-CO-OL-Le Mans
22.	RENAULT - CAR MANUFACTURING COMPANY - FRANCE	FR-CO-OL-TE-TR-Renault
23.	DUBLIN HOME – IRELAND	IE-CO-DublinHome
24.	MINISTRY OF PUBLIC WORKS – KUWAIT	KW-CO-Ministry of Public Works
25.	VENTILATION PIPES - MOROCCO	MA-CO-Ventilation shaft
26.	AUTOMATED PARKING SYSTEMS SILODAM AMSTERDAM - NETHERLANDS	NL-BR-CO-Automated Parking Systems Silodam Amsterdam
27.	CONTAINERS AND METAL GIRDERS - POLAND	PL-CO-TA-ZREMB
28.	LONDON – CARDINAL PLACE - UNITED KINGDOM	UK-CO-Cardinal Place
29.	EXXARO KUMBA GROOTGELUK COALMINE – SOUTH AFRICA	ZA-CO-TE-UN-Kumba Mine

CR: Crash barriers, metal sheet walls, railings and fences

1.	FENCE SUNNY EUROPE – BELGIUM	BE-AL-CR-HD-Fence Sunny Europe
2.	BLANKENBERGE - PARAVENT – BELGIUM	BE-CO-CR-MA-OL-Paravent
3.	ANTWERP - CRASH BARRIERS – BELGIUM	BE-CR-OL-Antwerp
4.	INTERCOMMUNALE E3 - METAL CONSTRUCTIONS - BELGIUM	BE-CR-OL-TE-Intercomm.
5.	CALLUWAERTS - FENCE – BELGIUM	BE-CR-Calluwaerts
6.	CHIMAY – SIGN OVER THE HIGHWAY - BELGIUM	BE-CR-Chimay
7.	DE GIEY – THE FENCE OF THE CASSTLE - BELGIUM	BE-CI-CR-OL-De Giey
8.	SLAUGHTERHOUSE CHARLEROI - BELGIUM	BE-CR-FO-HD-LT-OL-TE-Abattoir Charleroi
9.	HERAS – A FENCE – BELGIUM	BE-CR-OL-Heras
10.	GENT - KEIZER BRIDGE - BELGIUM	BE-BR-CR-OL-Keizer Bridge
11.	KLEIN KASTEELKEN – CAST IRON FENCE - BELGIUM	BE-CI-CR-OL-TC-Klein Kasteelken
12.	ZEEBRUGGE - UNDERGROUND CROSSING - BELGIUM	BE-CR-OL-Zeebrugge
13.	NO-PARKING POSTS BRUSSELS	BE-CR-TC-Amsterdammertjes Stad Brussel
14.	ECOVIAS – CRASH BARRIERS - BRAZIL	BR-CR-Ecovias
15.	DÜSSELDORF HIGHWAY - CRASH BARRIERS - GERMANY	DE-CR-OL-TE-Düss.Highway
16.	CRASHBARRIERS ON OUM RABII BRIDGE - MOROCCO	MA-CR-Bridge D'Oum Rabii
17.	CRASH BARRIERS - TROST – THE NETHERLANDS	NL-CR-Trost
18.	FOOTBRIDGES AND PROTECTION BARRIERS BYDGOSZCZ - POLAND	PL-BR-CR-Bydgoszcz
19.	RENOVATION OF THE SIERKIERKOWSKI BRIDGE IN WARSAW, NATIONAL ROAD- POLAND	PL-BR-CR-Sierkierkowski Bridge
20.	LAND TRANSPORT AUTHORITY - GUARD RAIL PANELS - SINGAPORE	SG-CR-OL-Land Transport Authority

DI: Dipping

1.	CAMPA – STEEL PANELS - BELGIUM	BE-DI-Campa
2.	SUARNABHUMI – AIRPORT - THAILAND	TH-AP-DI-SuvarnabhumiAirport



- | | | |
|----|--|------------------------------------|
| 3. | POLES ARMY TENTS - UNITED KINGDOM | UK-AR-DI-Poles Army Tents |
| 4. | DURAPIPE STEEL PRODUCTION - SOUTH AFRICA | ZA-DI-OL-Durapipe steel production |

DS: Do-it Yourself**EL: Electricity, Power stations**

- | | | |
|-----|--|---|
| 1. | ALCOA LTD - AUSTRALIA | AU-EL-HD-LT-PY-Alcoa |
| 2. | TRANSEND NETWORKS - AUSTRALIA | AU-EL-PY-TE-Transend Networks |
| 3. | TRANSGRID NETWORKS – NEW SOUTH WALES | AU-EL-PY-Transgrid Networks |
| 4. | TRACTEBEL – POWER STATION - BELGIUM | BE-CO-EL-OL-TE-Tractebel |
| 5. | FURNAS – ELECTRICITY PYLONS - BRAZIL | BR-EL-PY-TE-Furnas |
| 6. | CONTRACTOR – TURBINES - CHINA | CN-EL-CWTW |
| 7. | KRASIKOV TRANSFORMER STATION - CZECH REPUBLIC | CZ-EL-OL-PY-Krasikov |
| 8. | SLAVETICE TRANSFORMER STATION – CZECH REPUBLIC | CZ-EL-PY-Slavetice |
| 9. | TEMELIN NUCLEAR POWER PLANT - CZECH REPUBLIC | CZ-EL-OL-Temelin |
| 10. | RWE - AG – ELECTRICITY COMPANY - GERMANY | DE-EL-OL-TE-RWE |
| 11. | PLN HIGH TENSION PYLONS – INDONESIA | ID-EL-HD-PY-PLN High Tension Pylons |
| 12. | TRANSFORMERS – SOUTH KOREA | KR-EL-Transformers |
| 13. | TRASH RACKS POWER PLANT – SOUTH KOREA | KR-EL-IM-MA-TC-Trash rack |
| 14. | MINISTRY OF ELECTRICITY AND WATER – KUWAIT | KW-EL-OL-TE-Ministry of Electricity and Water |
| 15. | NATIONAL GRID CORPORATION PHILIPPINES – PHILIPPINES | PH-EL-HD-PY-National Grid Corporation Philippines |
| 16. | SANTA RITA BALFOUR BEATTY – PHILIPPINES | PH-EL-HD-PY-Santa Rita Balfour Beatty |
| 17. | REDE ELECTICA NACIONAL
POWER STATIONS AND SUPPLY LINES - PORTUGAL | PT-EL-OL-PY-TE-REN |
| 18. | ENERGOPROJECT – TRANSMISSION TOWERS - QATAR | QA-EL-OL-PY-TE-Energoproject |
| 19. | ELECTRICA - NATIONAL ELECTRICITY SUPPLIER - ROMANIA | RO-EL-OL-TE-Electrica |
| 20. | ARAD POWER STATION - ROMANIA | RO-EL-PY-Arad |
| 21. | GLOW ENERGY PUBLIC COMPANY MONOPOLES - THAILAND | TH-EL-HD-PY-Glow Energy Public Company Monopoles |
| 22. | FORMOSA PLASTICS COMPANY TRANSMISSION TOWERS - TAIWAN | TW-EL-HD-PY-TE-Formosa |
| 23. | POWER COMPANY – POWER PYLONS - TAIWAN | TW-EL-HD-OL-PY-TE-TPC |
| 24. | POWER PLANTS - TAIWAN | TW-EL-TC-ZC-Power Plants |
| 25. | CHERNOBYL NUCLEAR POWER STATION - UKRAINE | UA-EL-Chernobyl |
| 26. | KIEV ENERGO POWER PLANT - UKRAINE | UA-EL-HD-PY-Kiev Energo |
| 27. | ZUYEVSKAYA THERMAL POWER PLANT - UKRAINE | UA-EL-Zuyevskaya |

FO: Food

- | | | |
|----|---|---|
| 1. | SLAUGHTERHOUSE CHARLEROI - BELGIUM | BE-CR-FO-HD-LT-OL-TE-Abattoir Charleroi |
| 2. | SLAUGHTERHOUSES - BELGIUM | BE-FO-OL-Goossens |
| 3. | IGLO OLA – METAL STRUCTURES - BELGIUM | BE-FO-Iglo Ola |
| 4. | DOSSCHE – CATTLE FEED TANKS - BELGIUM | BE-FO-TA-Dossche |
| 5. | QUARTES CATTLE FEED COMPANY - BELGIUM | BE-FO-HD-OL-TA-TE-Quartes |
| 6. | VERDEGEM CATTLE FEED COMPANY - BELGIUM | BE-FO-TE-Verdegem |
| 7. | CATTLE- AND PIGFARM - FINLAND | FI-AG-FO-HD-Cattle and Pig farm |
| 8. | SLAUGHTERHOUSE NÎMES MARCHÉ GARE - FRANCE | FR-FO-Nîmes |

HD: Applications on Hot-Dip

- | | | |
|----|-----------------------|-------------------------|
| 1. | ALCOA LTD - AUSTRALIA | AU-EL-HD-LT-PY-Alcoa |
| 2. | CULVERTS - AUSTRALIA | AU-HD-HU-IM-UN-Culverts |



3.	FENCE SUNNY EUROPE – BELGIUM	BE-AL-CR-HD-Fence Sunny Europe
4.	SLAUGHTERHOUSE CHARLEROI – BELGIUM	BE-CR-FO-HD-LT-OL-TE-AbattoirCharleroi
5.	QUARTES CATTLE FEED COMPANY - BELGIUM	BE-FO-HD-OL-TA-TE-Quartes
6.	DE LIJN – PYLONS – BELGIUM	BE-HD-OL-PY-RW-De Lijn
7.	SILOS DE COCK – BELGIUM	BE-HD-TA-De Cock
8.	SILO'S DUBO DEUREN – ERPE-MERE	BE-HD-TA-Silo's Dubo Deuren
9.	RENOVATION SCHOOL SAINT-JOSEPH – LEVIS QUEBEC	CA-AL-AM-HD-Saint-Joseph
10.	USNS ZEUS CABLESHIP - USA	CA-AR-MA-HD-SH-USNS Zeus Cableship
11.	MINISTRY OF TRANSPORT - QUEBEC	CA-HD-TE-Ministry of transport
12.	GUANGZOU NEW BAIYUN AIRPORT - CHINA	CN-AP-HD-Baiyun
13.	CHONGQING BROADCASTING COMPANY - CHINA	CN-HD-PY-Chong Broad
14.	DÜSSELDORF AIRPORT - GERMANY	DE-AP-CO-HD-OL-TE-Düss. Airport
15.	CATTLE- AND PIGFARM - FINLAND	FI-AG-FO-HD-Cattle and Pigfarm
16.	DIRECTION DEPARTEMENTALE DE L'EQUIPEMENT, VENDEE SEA BUOYS – FRANCE	FR-HD-IM-MA-OL-TE-Sea Buoys
17.	ZINGA ANTICORROSION DISTRIBUTOR - FRANCE	FR-HD-TE-Guerin
18.	OHENE DJAN SPORT STADIUM LIGHT POLES - GHANA	GH-AM-HD-PY-OheneDjanstadium
19.	PLN HIGH TENSION PYLONS – INDONESIA	ID-EL-HD-PY-PLN High Tension Pylons
20.	GRAIN SILOS NADOR CEREALES – MOROCCO	MA-AG-HD-TA-Grain Silos Nador Cereales
21.	TENAGA NASIONAL BERHAD - PYLONS - MALAYSIA	MY-HD-PY-Tenaga Nasional Berhad
22.	PHCN - POWER HOLDING COMPANY OF NIGERIA - NIGERIA	NG-HD-PY-PHCN
23.	NATIONAL GRID CORPORATION PHILIPPINES – PHILIPPINES	PH-EL-HD-PY-National Grid Corporation Philippines
24.	SANTA RITA BALFOUR BEATTY – PHILIPPINES	PH-EL-HD-PY-Santa Rita Balfour Beatty
25.	YUZHNY GREENHOUSE FARM - RUSSIA	RU-AG-HD-Yuzhny
26.	GLOW ENERGY PUBLIC COMPANY MONOPOLES - THAILAND	TH-EL-HD-PY-Glow Energy Public Company Monopoles
27.	LIGHT POLES – DON MUANG TOLL WAY – THAILAND	TH-HD-PY-Don Muang Toll
28.	FORMOSA PLASTICS COMPANY TRANSMISSION TOWERS - TAIWAN	TW-EL-HD-PY-Formosa
29.	POWER COMPANY – POWER PYLONS - TAIWAN	TW-EL-HD-OL-PY-TE-TPC
30.	EDEN GREENHOUSE DOME – UNITED KINGDOM	UK-AG-HD-HT-TP-Eden
31.	CULVERTS – UNITED KINGDOM	UK-HD-HU-IM-UN-Culverts
32.	KIEV ENERGO POWER PLANT - UKRAINE	UA-EL-HD-PY-Kiev Energo
33.	US ARMY -UNITED STATES OF AMERICA	US-AR-HD-OL-TE-TR-US Army
34.	LIGHT POLES, TERMINAL CUENCA DEL PLATA, PORT OF MONTEVIDEO, URUGUAY	UY-HD-PY-Katoennatie Light Pole

HT: High temperatures

1.	FLOREAC – COAL FUNNEL – BELGIUM	BE-AZ-HT-OL-Floreac
2.	CARSID - BELGIUM	BE-AZ-HT-OL-TE-Carsid
3.	SULTAM – CHIMNEY - ISRAEL	IL-AZ-HT-OL-Sultam
4.	DERBY – TURBINE EXHAUST STACKS - UNITED KINGDOM	UK-AZ-HT-OL-TE-Derby
5.	EDEN GREENHOUSE DOME – UNITED KINGDOM	UK-AG-HD-HT-TP-Eden
6.	PORT ELISABETH ELECTRICITY DEPARTMENT - FUEL TANKS AND EXHAUST – SOUTH AFRICA	ZA-AZ-HT-TA-Port.El.

HU: Humidity and vapour

1.	CULVERTS - AUSTRALIA	AU-HD-HU-IM-UN-Culverts
2.	J.M. INDUSTRIAL – RACKS, METAL EQUIPMENT AND STRUCTURES IN BRICK MANUFACTURING FACTORIES - BELGIUM	BE-AZ-CE-HU-OL-TE-JM Ind.
3.	BASF – CHEMICAL COMPANY - BELGIUM	BE-HU-PE-TA-TE-BASF



4.	GREENHOUSE - FINLAND	FI-HU-TP-Greenhouse
5.	CULVERTS - UNITED KINGDOM	UK-HD-HU-IM-UN-Culverts

IM: Immersion

1.	CULVERTS - AUSTRALIA	AU-HD-HU-IM-UN-Culverts
2.	DE BRANDT – FENDER CONSTRUCTIONS - BELGIUM	BE-BR-IM-OL-De Brandt
3.	DIRECTION DEPARTEMENTALE DE L'EQUIPEMENT, VENDEE SEA BUOYS – FRANCE	FR-HD-IM-MA-OL-TE-Sea Buoys
4.	BANGOR PIER – IMMERSED PILES - IRELAND	IE-IM-MA-Bangor
5.	KILLYBEGS FISHING PIER - IMMERSED PIER LEGS - IRELAND	IE-IM-MA-TE-Killybegs pier
6.	SLUICE GATES WEST BENGAL – INDIA	IN-IM-Sluice gates West Bengal
7.	TRASH RACKS POWER PLANT – SOUTH KOREA	KR-EL-IM-MA-TC-Trash rack
8.	SEA BUOYS - SENEGAL	SN-IM-MA-Sea Buoy
9.	CULVERTS - UNITED KINGDOM	UK-HD-HU-IM-UN-Culverts

LT: Low temperatures

1.	ALCOA LTD - AUSTRALIA	AU-EL-HD-LT-PY-Alcoa
2.	SLAUGHTERHOUSE CHARLEROI - BELGIUM	BE-CR-FO-LT-OL-TE-Abattoir Charleroi
3.	BONNETS OF SRC BUNDLES - BELGIUM	BE-LT-TE-SPX Cooling Technologies
4.	METRO – MINSK – BELARUS	BY-AM-LT-TC-Metro

MA: Marine environments and offshore

1.	BLANKENBERGE - PARAVENT – BELGIUM	BE-CO-CR-MA-OL-Paravent
2.	BLOMMAERT - SHIP HATCHES - BELGIUM	BE-MA-SH-BlommaertHatches
3.	DECLOEDT – DREDGING COMPANY - BELGIUM	BE-OL-MA-TE-Decloedt
4.	DRILLING PLATFORM - BRAZIL	BR-MA-PE-Polvo
5.	USNS ZEUS CABLESHIP - USA	CA-AR-MA-HD-SH-USNS Zeus Cableship
6.	BC FERRY TERMINALS - CANADA	CA-BR-MA-OL-TE-BC Ferry
7.	PACIFIC GRAIN ELEVATOR - CANADA	CA-CN-MA-Pacific Grain Elevator
8.	CITY OF BURNABY – A SLOPE - CANADA	CA-MA-TE-CityOfBurnaby
9.	NATIONAL GRAND THEATRE BEIJING - CHINA	CN-AM-MA-Theatre Beijing
10.	YUEHAI PASSAGE TRAIN FERRY PIER TERMINAL - CHINA	CN-AZ-MA-RW-YuehaiTrainFerry
11.	EL SALAAM BRIDGE - EGYPT	EG-BR-MA-PI-TE-Salaam
12.	DIRECTION DEPARTEMENTALE DE L'EQUIPEMENT, VENDEE SEA BUOYS – FRANCE	FR-HD-IM-MA-OL-TE-Sea Buoys
13.	TRANSOCEAN SEDCO FOREX – OFFSHORE DRILLING COMPANY INDONESIA	ID-MA-PE-TransSedcoForex
14.	BANGOR PIER – IMMERSED PILES - IRELAND	IE-IM-MA-Bangor
15.	KILLYBEGS FISHING PIER - IMMERSED PIER LEGS - IRELAND	IE-IM-MA-TE-Killybegs pier
16.	TRASH RACKS POWER PLANT – SOUTH KOREA	KR-EL-IM-MA-TC-Trash rack
17.	SHELL TANK - MOROCCO	MA-MA-PE-TA-Shell
18.	NATIONAL ELECTRICITY COMPANY - MOROCCO	MA-MA-PI-ONE
19.	SHELL - PETROCHEMICAL COMPANY - NETHERLANDS	NL-MA-PE-TE-Shell
20.	KALVOYA BRIDGE - NORWAY	NO-BR-MA-OL-TE-Kalvoja
21.	ST. PAUL – JETTY – REUNION	RE-BR-MA-St. Paul
22.	SEA BUOYS - SENEGAL	SN-IM-MA-Sea Buoy
23.	STATIONARY DOCK - SENEGAL	SN-MA-Dry Dock
24.	OFFICE TOGOLAIS DES PHOSPHATES PHOSPHATE MINE OFFSHORE CHARGING CRANES - TOGO	TG-CN-MA-OL-PE-Off. Togolais
25.	YACHT WATER TANKS - UNITED KINGDOM	UK-MA-OL-Adela
26.	OFFSHORE COMPANIES – UNITED KINGDOM	UK-MA-Offshore



27.	SHIPS – UNITED KINGDOM	UK-MA-SH-Ships
28.	VECTOR INTERNATIONAL – OFFSHORE NUTS AND BOLTS – UNITED KINGDOM	UK-MA-NB-PE-TE-Vector

NB: Nuts and bolts

1.	VECTOR INTERNATIONAL – OFFSHORE NUTS AND BOLTS – UNITED KINGDOM	UK-MA-NB-PE-TE-Vector
----	--	-----------------------

OL: Applications ≥ 10 years

1.	DIRK – AGRICULTURAL MACHINERY– BELGIUM	BE-AG-OL-TE-Martens
2.	GENT KIOSK - BELGIUM	BE-AM-CO-OL-GentKiosk
3.	NATO – NATO PUMP STATIONS - BELGIUM	BE-AR-OL-PI-TE-NATO
4.	BELGIAN ARMY - NAVY SHIPS AND ANTENNA - BELGIUM	BE-AR-OL-PY-SH-Belgian Army
5.	CARSID - BELGIUM	BE-AZ-HT-OL-TE-Carsid
6.	FLOREAC – COAL FUNNEL - BELGIUM	BE-AZ-HT-OL-Floreac
7.	EUROPEAN TECHNICAL ASSOCIATION FOR PROTECTIVE COATINGS - BELGIUM	BE-BR-OL-TE-Etapc
8.	DE BRANDT - BELGIUM	BE-BR-IM-OL-DeBrandt
9.	MELLE BRIDGE - BELGIUM	BE-BR-OL-TC-Melle Bridge
10.	WEGENFONDS BRIDGE - BELGIUM	BE-BR-OL-Wegenfonds
11.	HOLCIM GRANULATS - CEMENT FACTORY - BELGIUM	BE-CE-OL-TE-Holcim
12.	J.M. INDUSTRIAL - BELGIUM	BE-AZ-CE-HU-OL- TE-JM-Ind
13.	DE GIEY - BELGIUM	BE-CI-CR-OL-De Giey
14.	KLEIN KASTEELKEN – CAST IRON FENCE - BELGIUM	BE-CI-CR-OL-TC-Klein Kast.
15.	ANTWERP PORT CRANES - BELGIUM	BE-CN-OL-AntwerpPortCranes
16.	HARBOUR OF GENK - BELGIUM	BE-CN-OL-TE-KHG
17.	BACOB BANK DENDERMONDE - BELGIUM	BE-CO-OL-Bacob
18.	CNO - A COOLING TOWER - BELGIUM	BE-CO-OL-CNO
19.	BLANKENBERGE PARAVENT – BELGIUM	BE-CO-CR-MA-OL-Paravent
20.	SE INDUSTRIES - BELGIUM	BE-CO-OL-SE Industries-
21.	SLAUGHTERHOUSE CHARLEROI - BELGIUM	BE-CR-FO-LT-OL-TE-AbattoirCharleroi
22.	HERAS - A FENCE - BELGIUM	BE-CR-OL-Heras
23.	INTERCOMMUNALE E3 - METAL CONSTRUCTIONS - BELGIUM	BE-CR-OL-TE-Intercomm
24.	KEIZER BRIDGE GHENT - BELGIUM	BE-BR-CR-OL-Keizer Bridge
25.	ZEEBRUGGE UNDERGROUND CROSSING - BELGIUM	BE-CR-OL-Zeebrugge
26.	TRACTEBEL – POWER STATION - BELGIUM	BE-CO-EL-OL-TE-Tractebel
27.	SLAUGHTERHOUSES - BELGIUM	BE-FO-OL-Goossens
28.	CATTLE FEED COMPANY - BELGIUM	BE-FO-HD-OL-TA-TE-Quartes
29.	DECLOEDT – DREDGING COMPANY - BELGIUM	BE-MA-OL-TE-Decloedt
30.	TOTAL PETROCHEMICAL FELUY - PIPELINES - BELGIUM	BE-OL-PE-PI-TE-Fina
31.	WOLF OIL CORPORATION - BELGIUM	BE-OL-PE-TA-Wolf oil
32.	ASSOCIATION COMPANY OF PRODUCTION OF ELECTRICITY - S.P.E.- BELGIUM	BE-OL-PI-TE-SPE
33.	KLUIZEN WATER PURIFICATION STATION - BELGIUM	BE-OL-PI-TC-Kluizen
34.	PIT COAL MINE - BELGIUM	BE-OL-PI-UN-Kemp.Steenk
35.	STORA ENSO PAPER MILL - BELGIUM	BE-OL-PP-TE-Stora Enso
36.	PUBLIC FOUNTAIN IN GHENT - BELGIUM	BE-OL-PW-TC-TE-Gent fount.
37.	ELECTRABEL - BELGIUM	BE-OL-PY-Electrabel
38.	DE LIJN – PYLONS - BELGIUM	BE-HD-OL-PY-RW-De Lijn
39.	CITA – RAILWAY WAGON - BELGIUM	BE-OL-RW-TE-CITA
40.	DREDGING COMPANIES DECLOEDT - BELGIUM	BE-OL-SH-TE-Dredging



41.	NARAI – SAILING SHIP - BELGIUM	BE-OL-SH-TE-Narai
42.	DE GRAEVE SHIPYARDS - BELGIUM	BE-OL-SH-TC-TE-De Graeve
43.	MERCATOR – SAILING SHIP - BELGIUM	BE-OL-SH-TC-Mercator
44.	WESTHINDER – LIGHTSHIP - BELGIUM	BE-OL-SH-TC-Westhinder
45.	RAILWAY OFFICE - BENIN	BJ-BR-OL-RW-Chemins Fer
46.	CONFEDERATION BRIDGE - CANADA	CA-BR-OL-Confederation
47.	BC FERRY TERMINALS - CANADA	CA-BR-MA-OL-TE-BC Ferry
48.	OVERLANDER BRIDGE - CANADA	CA-BR-OL-TE-Overlander
49.	BLANICE RIVER BRIDGE - CZECH REPUBLIC	CZ-BR-OL-Blanice
50.	KRASIKOV TRANSFORMER STATION - CZECH REPUBLIC	CZ-EL-OL-PY-Krasikov
51.	TEMELIN NUCLEAR POWER PLANT - CZECH REPUBLIC	CZ-EL-OL-Temelin
52.	DÜSSELDORF AIRPORT - GERMANY	DE-AP-CO-HD-OL-TE-Düss.Airport
53.	SCHWENK – CEMENT FACTORY - GERMANY	DE-CE-OL-TE-Schwenk
54.	ZDF TELEVISION BROADCASTING STATION - GERMANY	DE-CO-OL-ZDF
55.	DÜSSELDORF HIGHWAY - CRASH BARRIERS - GERMANY	DE-CR-OL-TE-Düss. Highway
56.	RWE - AG – ELECTRICITY COMPANY - GERMANY	DE-EL-OL-TE-RWE
57.	STROM UND HAUFENBAU HAMBURG HARBOUR COMPAGNY - GERMANY	DE-OL-PE-TA-TE-Strom
58.	LE MANS CENTRE OF SPORTS AND CULTURE STEEL CONSTRUCTION - FRANCE	FR-CO-OL-Le Mans
59.	RENAULT - CAR MANUFACTURING COMPANY - FRANCE	FR-CO-OL-TE-TR-Renault
60.	DIRECTION DEPARTEMENTALE DE L'EQUIPEMENT - FRANCE	FR-HD-IM-MA-OL-TE-Sea Buoys
61.	SOCIETE NATIONALE DE CHEMINS DE FER - FRANCE	FR-OL-RW-TE-SNCF
62.	SULTAM – CHIMEY - ISRAEL	IL-AZ-HT-OL-Sultam
63.	ABADAN & SHIRAZ REFINERIES - IRAN	IR-OL-PE-TE-Abadan Shiraz
64.	MINISTRY OF PUBLIC WORKS - KUWAIT	KW-CO-OL-TE-Ministry of Public Works
65.	MINISTRY OF ELECTRICITY AND WATER - KUWAIT	KW-EL-OL-TE-Ministry of Electricity and Water
66.	KALVOYA BRIDGE - NORWAY	NO-BR-MA-OL-TE-Kalvoja
67.	RYSTRAUM MOTOR SHIP - NORWAY	NO-OL-SH-TE-Rystraum
68.	REDE ELECTICA NACIONAL - PORTUGAL	PT-EL-OL-PY-TE-REN
69.	ENERGOPROJECT – TRANSMISSION TOWERS - QATAR	QA-EL-OL-PY-TE-Energo
70.	ELECTRICA - NATIONAL ELECTRICITY SUPPLIER - ROMANIA	RO-EL-OL-TE-Electrica
71.	SNCFR - ROMANIAN RAILWAYS - ROMANIA	RO-OL-RW-TE-SNCFR
72.	LAND TRANSPORT AUTHORITY GUARD RAIL PANELS - SINGAPORE	SG-CR-OL-Land Transp. Auth.
73.	PHOSPHATE MINE OFFSHORE CHARGING CRANES - TOGO	TG-CN-MA-OL-PE-Off. Togolais
74.	POWER COMPANY – POWER PYLONS - TAIWAN	TW-EL-HD-OL-PY-TE-TPC
75.	DERBY – TURBINE EXHAUST STACKS - UNITED KINGDOM	UK-AZ-HT-OL-TE-Derby
76.	NEWARK MARINA BRIDGE - UNITED KINGDOM	UK-BR-OL-Newark Mar.
77.	YACHT WATER TANKS - UNITED KINGDOM	UK-MA-OL-Adela
78.	LONDON UNDERGROUND - UNITED KINGDOM	UK-OL-RW-TE-UN-London Underground
79.	US ARMY - UNITED STATES OF AMERICA	US-AR-OL-TE-TR-US Army
80.	LAFARGE - SOUTH AFRICA	ZA-CE-OL-Lafarge
81.	DURAPIPE STEEL PRODUCTION - SOUTH AFRICA	ZA-DI-OL-Durapipe steel production

PE: Chemical, Petrochemicals

1.	FLUXYS - BELGIAN LARGEST GAS SUPPLIER - BELGIUM	BE-PE-TE-Fluxys
2.	BASF – CHEMICAL COMPANY - BELGIUM	BE-HU-PE-TA-TE-BASF
3.	FINA CHEMICALS - PIPELINES - BELGIUM	BE-OL-PE-PI-TE-Fina
4.	WOLF OIL CORPORATION - BELGIUM	BE-OL-PE-TA-Wolf oil

5.	VAN BROEKHOVENS - DIESEL STORAGE TANKS – BELGIUM	BE-PE-TA-TE-Van Broekhoven
6.	DRILLING PLATFORM - BRAZIL	BR-MA-PE-Polvo
7.	KOBRIN OIL PUMPING STATION - BELARUS	BY-PE-TA-TC-Kobrin
8.	SHANGHAI DOVECHEM BOMTA TERMINAL - CHINA	CN-PE-TA-Bomta
9.	SHANGHAI PRAXAIR YIDIAN - GAS PROCESSING COMPANY - CHINA	CN-PE-Praxair
10.	STROM UND HAUFENBAU HAMBURG HARBOUR COMPAGNY - GERMANY	DE-OL-PE-TA-TE-Strom
11.	ABU QIR FERTILIZERS - EGYPT	EG-PE-AbuQirFert.
12.	TRANSOCEAN SEDCO FOREX – OFFSHORE DRILLING COMPANY INDONESIA	ID-MA-PE-TransSedcoForex
13.	ABADAN & SHIRAZ REFINERIES - IRAN	IR-OL-PE-TE-Abadan Shiraz
14.	NATIONAL IRANIAN GAS COMPANY - REBARS - IRAN	IR-PE-RE-NIGC
15.	KUWAIT OIL COMPANY - KUWAIT	KW-PE-TE-KOC
16.	PETROCHEMICAL COMPANY - NETHERLANDS	NL-MA-PE-TE-Shell
17.	SHELL TANK - MOROCCO	MA-MA-PE-TA-Shell
18.	OFFICE TOGOLAIS DES PHOSPHATES PHOSPHATE MINE OFFSHORE CHARGING CRANES - TOGO	TG-CN-MA-OL-PE-Off.Togolais
19.	VECTOR INTERNATIONAL – OFFSHORE NUTS AND BOLTS – UNITED KINGDOM	UK-MA-NB-PE-TE-Vector
20.	CLAMPS CCS – UNITED KINGDOM	UK-PE-PI-Clamps CCS
21.	OIL STORAGE TANK - EXXON MOBILE - UNITED KINGDOM	UK-PE-TA-Exxon Mobile

PI: Pipelines

1.	NATO – NATO PUMP STATIONS - BELGIUM	BE-AR-OL-PI-NATO
2.	FINA CHEMICALS - PIPELINES - BELGIUM	BE-OL-PE-PI-TE-Fina
3.	KLUIZEN WATER PURIFICATION STATION – BELGIUM	BE-OL-PI-TC-Kluizen
4.	KEMPENSE STEENKOOLMIJNEN – PIT COAL MINE - BELGIUM	BE-OL-PI-TE-UN-Kemp.Steenk.
5.	ASSOCIATION COMPANY OF PRODUCTION OF ELECTRICITY S.P.E – BELGIUM	BE-OL-PI-TE-SPE
6.	EL SALAAM BRIDGE - EGYPT	EG-BR-MA-PI-TE-Salaam
7.	GASCO COMPANY UNDERGROUND PIPELINES - EGYPT	EG-PI-UN-Gasco
8.	METRONCO – PIPELINES - GHANA	GH-PI-Metronco
9.	SEOUL AIR CONDITIONING – SOUTH KOREA	KR-AL-PI-Seoul Air Conditioning
10.	NATIONAL ELECTRICITY COMPANY - MOROCCO	MA-MA-PI-ONE
11.	GAS PIPELINES - POLAND	PL-PI-Wtoctawek
12.	TEMVAR BRASOV BRIDGE – ROMANIA	RO-BR-PI-Temvar Brasov Bridge
13.	MOSVODOKANAL – WATER SUPPLIER - RUSSIA	RU-PI-Mosvodo
14.	CLAMPS CCS – UNITED KINGDOM	UK-PE-PI-Clamps CCS

PP: Pulp and paper mills

1.	STORA ENSO PAPER MILL – BELGIUM	BE-OL-PP-TE-Stora Enso
2.	PULP AND PAPER INDUSTRY - CANADA	CA-PP-Pulp and Paper Industry

PW: Potable water

1.	GHENT - PUBLIC FOUNTAIN – BELGIUM	BE-OL-PW-TC-TE-Gent fount.
2.	RUBLEVO WATER INTAKE PLANT - RUSSIA	RU-PW-RE-Rublevo
3.	FURMANITE – A REFERENCE LETTER - UNITED KINGDOM	UK-PW-TE-Furmanite
4.	BRAITHWAITE TANK – UNITED KINGDOM	UK-PW-TA-Braithwaite tank

PY: Pylons, light poles, towers and wind mills

1.	ENERGEX - PYLONS - AUSTRALIA	AU-PY-Energex
2.	ALCOA LTD - AUSTRALIA	AU-EL-HD-LT-PY-Alcoa



3.	TRANSEND NETWORKS - AUSTRALIA	AU-EL-PY-TE-Transend Networks
4.	TRANSGRID NETWORKS – NEW SOUTH WALES	AU-EL-PY-Transgrid Networks
5.	BAKCELL COMMUNICATION TOWER - AZERBAIJAN	AZ-PY-TE-Bakcell Communication Tower
6.	BELGIAN ARMY - NAVY SHIPS AND ANTENNA - BELGIUM	BE-AR-OL-PY-SH-Belgian Army
7.	ELECTRABEL – ELECTRICITY COMPANY - BELGIUM	BE-OL-PY-Electrabel
8.	MULLEM WIND MILL – BELGIUM	BE-PY-Mullem Mill
9.	DE LIJN – PYLONS – BELGIUM	BE-HD-OL-PY-RW-De Lijn
10.	FURNAS – ELECTRICITY PYLONS - BRAZIL	BR-EL-PY-TE-Furnas
11.	MOBIMETAL – TELECOMMUNICATION PYLONS - CONGO	CD-PY-TE-Mobimetal
12.	CHONGQING BROADCASTING COMPANY - CHINA	CN-HD-PY-Chong Broad
13.	GUANGZHOU TV TOWER - CHINA	CN-PY-Guangzhou TV tower
14.	KRASIKOV TRANSFORMER STATION - CZECH REPUBLIC	CZ-EL-OL-PY-Krasikov
15.	SLAVETICE TRANSFORMER STATION – CZECH REPUBLIC	CZ-EL-PY-Slavitice
16.	KECHABIA - ALGERIA	DZ-PY-Kecahbia
17.	OHENE DJAN SPORT STADIUM LIGHT POLES - GHANA	GH-AM-HD-PY-OheneDjanStadium
18.	PLN HIGH TENSION PYLONS – INDONESIA	ID-EL-HD-PY-PLN High Tension Pylons
19.	LIGHT POLES OF THE ANFA AVENUE - MOROCCO	MA-PY-Anfa
20.	TENAGA NASIONAL BERHAD - PYLONS - MALAYSIA	MY-HD-PY-Tenaga Nasional Berhad
21.	PHCN - POWER HOLDING COMPANY OF NIGERIA - NIGERIA	NG-HD-PY-PHCN
22.	NATIONAL GRID CORPORATION PHILIPPINES – PHILIPPINES	PH-EL-HD-PY-National Grid Corporation Philippines
23.	SANTA RITA BALFOUR BEATTY – PHILIPPINES	PH-EL-HD-PY-Santa Rita Balfour Beatty
24.	REDE ELECTICA NACIONAL POWER STATIONS AND SUPPLY LINES - PORTUGAL	PT-EL-PY-TE-REN
25.	ENERGOPROJECT – TRANSMISSION TOWERS - QATAR	QA-EL-OL-PY-TE-Energo
26.	ARAD POWER STATION - ROMANIA	RO-EL-PY-Arad
27.	MUNTENIA – PYLONS - ROMANIA	RO-PY-TE-Muntenia
28.	PSA LIGHTING MASTS	SG-PY-PSA Lighting Masts
29.	GLOW ENERGY PUBLIC COMPANY MONOPOLES - THAILAND	TH-EL-HD-PY-Glow Energy Public Company Monopoles
30.	LIGHT POLES – DON MUANG TOLL WAY – THAILAND	TH-HD-PY-Don Muang Toll
31.	FORMOSA PLASTICS COMPANY TRANSMISSION TOWERS - TAIWAN	TW-EL-HD-PY-TE-Formosa
32.	POWER COMPANY – POWER PYLONS - TAIWAN	TW-EL-HD-OL-PY-TE-TPC
33.	TAIWAN POWER COMPANY - ZEPHYROS WIND MILLS - TAIWAN	TW-PY-ZC-Zephyros
34.	KIEV ENERGO POWER PLANT - UKRAINE	UA-EL-HD-PY-Kiev Energo
35.	KIEV ROAD ADMINISTRATION - UKRAINE	UA-PY-Kiev Road Administration
36.	NEXRAD TOWER – UNITED STATES OF AMERICA	US-AR-PY-Nexrad Tower
37.	LIGHT POLES, TERMINAL CUENCA DEL PLATA, PORT OF MONTEVIDEO, URUGUAY	UY-HD-PY-Katoennatie Light Pole
38.	HAI PHONG TOWER - PYLONS - VIETNAM	VN-PY-Hai Phong Tower

RE: Rebars

1.	TRANSFO ZWEVEGEM - BELGIUM	BE-RE-Transfo
2.	HANGZHOU BAY BRIDGE - CHINA	CN-BR-RE-Hangzhou Bay
3.	CONTRACTOR – TURBINES - CHINA	CN-RE-RW-CWTW
4.	NATIONAL IRANIAN GAS COMPANY - REBARS - IRAN	IR-PE-RE-NIGC
5.	REBAR SPRAYING INSTALLATION TEHRAN HARA - IRAN	IR-AS-RE-AutomSprayLine
6.	CHABAHAH PORT – REBARS - IRAN	IR-RE-TE-Chabahar
7.	OMRAN SAHEL INSTITUTE – REBARS - IRAN	IR-RE-TE-OmranSahelInst.
8.	PERLITE CONSTRUCTION - SULFUR EXPORT WHARF - IRAN	IR-RE-TE-PerliteConstr



9.	RAHE SAHEL INSTITUTE – REBARS - IRAN	IR-RE-TE-RaheSahelInst.
10.	PARS OIL & GAS CO. – REBARS - IRAN	IR-RE-TE-Pars Oil & Gas Co.
11.	RUBLEVO WATER INTAKE PLANT - RUSSIA	RU-PW-RE-Rublevo
12.	BUILDING WITH REBARS - RUSSIA	RU-RE-Building

RW: Railway

1.	QUEENSLAND RAILWAY BRIDGES - AUSTRALIA	AU-BR-RW-QR Railway Bridges
2.	DE LIJN – PYLONS – BELGIUM	BE-HD-OL-PY-RW-De Lijn
3.	CITA – RAILWAY WAGON - BELGIUM	BE-OL-RW-TE-Cita
4.	RAILWAY OFFICE - BENIN	BJ-BR-OL-RW-Chemins Fer
5.	DORBRAS RAILWAY COMPANY - BRAZIL	BR-RW-TE-Dorbras
6.	YUEHAI PASSAGE TRAIN FERRY PIER TERMINAL - CHINA	CN-AZ-MA-RW-YuehaiTrainFerry
7.	CONTRACTOR – TURBINES - CHINA	CN-RE-RW-CWTW
8.	MAGLEV TRANSRAPIR RAILWAY - CHINA	CN-RW-Maglev
9.	SOCIETE NATIONALE DE CHEMINS DE FER - FRANCE	FR-OL-RW-TE-SNCF
10.	SNCFR - ROMANIAN RAILWAYS - ROMANIA	RO-RW-OL-TE-SNCFR
11.	TELEGONDOLA – ROMANIA	RO-RW-TE-Telegondola
12.	TRAIN CARRIAGE TRANSRAIL - SENEGAL	SN-RW-TA-Train Wagon
13.	LONDON UNDERGROUND – UNITED KINGDOM	UK-OL-RW-TE-UN-London Underground
14.	LONDON UNDERGROUND – UNITED KINGDOM	UK-OL-RW-TE-Underground

SH: Ships

1.	BELGIAN ARMY - NAVY SHIPS AND ANTENNA - BELGIUM	BE-AR-OL-PY-SH-Belgian Army
2.	BLOMMAERT SHIP HATCHES - BELGIUM	BE-MA-SH-BlommaertHatches
3.	BONNE INDUSTRIAL - SHIPS - BELGIUM	BE-SH-TC-Bonne Industrial
4.	COBBAERT SHIP - BELGIUM	BE-SH-Cobbaert
5.	DE GRAEVE SHIPYARDS - BELGIUM	BE-OL-SH-TC-TE-De Graeve
6.	DREDGING COMPANIES DECLOEDT, JAN DE NUL & DREDGING INTERNATIONAL - BELGIUM	BE-OL-SH-TE-Dredging
7.	DUPON BOAT - BELGIUM	BE-SH-Dupon
8.	FULTON MARINE - BELGIUM	BE-SH-Fulton
9.	MERCATOR – SAILING SHIP - BELGIUM	BE-OL-SH-TC-Mercator
10.	NARAI – SAILING SHIP - BELGIUM	BE-OL-SH-TE-Narai
11.	WALTZING MATHILDE SHIP - BELGIUM	BE-SH-Waltzing
12.	WESTHINDER – LIGHTSHIP - BELGIUM	BE-OL-SH-TC-Westhinder
13.	SHIP - BELGIUM	BE-SH-TE-West-VI.
14.	USNS ZEUS CABLESHIP - USA	CA-AR-MA-HD-SH-USNS Zeus Cableship
15.	EXXON MOBIL PLATFORM - MALAYSIA	MY-SH-ExxonMobil
16.	RYSTRAUM MOTOR SHIP - NORWAY	NO-OL-SH-TE-Rystraum
17.	COAL TRANSPORT SHIP - TAIWAN	TW-SH-TC-Coal Tr Ship
18.	SHIPS – UNITED KINGDOM	UK-MA-SH-Ships
19.	ITCHEN MARINE – UNITED KINGDOM	UK-SH-Itchen

TA: Tanks, containers and silos

1.	DOSSCHE – CATTLE FEED TANKS - BELGIUM	BE-FO-TA-Dossche
2.	QUARTES CATTLE FEED COMPANY - BELGIUM	BE-FO-HD-OL-TA-TE-Quartes
3.	BASF – CHEMICAL COMPANY - BELGIUM	BE-HU-PE-TA-TE-BASF
4.	VAN BROEKHOVENS - DIESEL STORAGE TANKS – BELGIUM	BE-PE-TA-TE-Van Broekhoven
5.	DUMON AGRO - CONTAINER - BELGIUM	BE-TA-Dumon



6.	GENT PUBLIC WORKS – SALT FUNNELS - BELGIUM	BE-TA-Gent Pub.
7.	COCA COLA - BELGIUM	BE-TA-Coca Cola
8.	SILOS DE COCK – BELGIUM	BE-HD-TA-De Cock
9.	SILO'S DUBO DEUREN – ERPE-MERE	BE-HD-TA-Silo's Dubo Deuren
10.	SNACK FOODS VEURNE - BELGIUM	BE-TA-SnackFoods
11.	PAESEN - CONCRETE MILL - BELGIUM	BE-CE-TA-Paesen
12.	WOLF OIL CORPORATION - BELGIUM	BE-OL-PE-TA-Wolf oil
13.	MAKRO – A TANK - BELGIUM	BE-TA-Makro
14.	SILOS VANDENBERGHE - BELGIUM	BE-TA-Vandenberghe
15.	KOBRIN OIL PUMPING STATION - BELARUS	BY-PE-TA-TC-Kobrin
16.	SHANGHAI DOVECHEM BOMTA TERMINAL - CHINA	CN-TA-PE-Bomta
17.	STROM UND HAUFENBAU HAMBURG HARBOUR COMPAGNY - GERMANY	DE-OL-PE-TA-TE-Strom
18.	GRILLO WERKE AG GAS CYLINDERS GERMANY	DE-TA-Grillo Werke AG
19.	WATER STORAGE TANKS ROUREKELA – INDIA	IN-TA-Water Storage Tanks
20.	GRAIN SILOS NADOR CEREALS – MOROCCO	MA-AG-HD-TA-Grain Silos Nador Cereales
21.	HYDRO-TANK - MAROC	MA-TA-Hydro-tank
22.	SHELL TANK - MOROCCO	MA-MA-PE-TA-Shell
23.	TANK - MOROCCO	MA-TA-Kettle construct
24.	STORAGE TANKS - NORWAY	NO-TA-Storage tanks
25.	TANKS – NEW PLYMOUTH – NEW ZEALAND	NZ-TA-New Plymouth
26.	CONTAINERS AND METAL GIRDERS - POLAND	PL-CO-TA-ZREMB
27.	TRAIN CARRIAGE TRANSRAIL - SENEGAL	SN-RW-TA-Train Wagon
28.	MAERSK CONTAINERS - TAIWAN	TW-TA-TE-Maersk
29.	OIL STORAGE TANK - EXXON MOBILE - UNITED KINGDOM	UK-PE-TA-Exxon Mobile
30.	BRAITHWAITE TANK – UNITED KINGDOM	UK-PW-TA-Braithwaite tank
31.	PORT ELISABETH ELECTRICITY DEPARTMENT - FUEL TANKS AND EXHAUST – SOUTH AFRICA	ZA-AZ-HT-TA-Port.EL

TC: Topcoats

1.	REYNELLA BRIDGE - AUSTRALIA	AU-BR-TC-Reynella Bridge
2.	MELLE BRIDGE - BELGIUM	BE-BR-OL-TC-Melle Bridge
3.	DULLE GRIET - CANNON – BELGIUM	BE-CI-TC-Dulle Griet
4.	KLEIN KASTEELKEN – CAST IRON FENCE - BELGIUM	BE-CI-CR-OL-TC-Klein Kast.
5.	NO-PARKING POSTS BRUSSELS	BE-CR-TC-Amsterdammertjes Stad Brussel
6.	WATER PURIFICATION STATION – BELGIUM	BE-OL-PI-TC-Kluizen
7.	PUBLIC FOUNTAIN IN GHENT – BELGIUM	BE-OL-PW-TC-TE-Gent fount.
8.	BONNE INDUSTRIAL - SHIPS - BELGIUM	BE-SH-TC-Bonne Industrial
9.	DE GRAEVE SHIPYARDS - BELGIUM	BE-OL-SH-TC-TE-De Graeve
10.	MERCATOR – SAILING SHIP - BELGIUM	BE-OL-SH-TC-Mercator
11.	WESTHINDER – LIGHTSHIP - BELGIUM	BE-OL-SH-TC-Westhinder
12.	TEATRO MUNICIPAL - BRAZIL	BR-CI-CO-TC-Teatro
13.	METRO – MINSK – BELARUS	BY-AM-LT-TC-Metro
14.	KOBRIN OIL PUMPING STATION - BELARUS	BY-PE-TA-TC-Kobrin
15.	TRASH RACKS POWER PLANT – SOUTH KOREA	KR-EL-IM-MA-TC-Trash rack
16.	POWER PLANTS - TAIWAN	TW-EL-TC-ZC-Power Plants
17.	COAL TRANSPORT SHIP - TAIWAN	TW-SH-TC-Coal Tr Ship

TE: Testimonials

1.	TRANSEND NETWORKS - AUSTRALIA	AU-EL-PY-TE-Transend Networks
----	-------------------------------	-------------------------------



2.	BAKCELL COMMUNICATION TOWER - AZERBAIJAN	AZ-PY-TE-Bakcell Communication Tower
3.	QUARTES CATTLE FEED COMPANY - BELGIUM	BE-FO-HD-OL-TA-TE-Quartes
4.	DREDGING COMPANIES DECLOEDT – BELGIUM	BE-OL-SH-TE-Dredging
5.	DE GRAEVE SHIPYARDS – BELGIUM	BE-OL-SH-TC-TE-De Graeve
6.	INTERCOMMUNALE E3 – METAL CONSTRUCTIONS - BELGIUM	BE-CR-OL-TE-Intercomm
7.	EUROPEAN TECHNICAL ASSOCIATION FOR PROTECTIVE COATINGS – BELGIUM	BE-BR-OL-TE-Etapc
8.	PIT COAL MINE – BELGIUM	BE-OL-PI-TE-UN-Kemp.Steenk
9.	SLAUGHTERHOUSE CHARLEROI – BELGIUM	BE-CR-FO-HD-LT-OL-TE-AbattoirCharleroi
10.	ASSOCIATION COMPANY OF PRODUCTION OF ELECTRICITY – S.P.E. – BELGIUM	BE-OL-PI-TE-SPE
11.	TOTAL PETROCHEMICAL FELUY – PIPELINES – BELGIUM	BE-OL-PE-PI-TE-Fina
12.	NARAI – SAILING SHIP – BELGIUM	BE-OL-SH-TE-Narai
13.	NATO – NATO PUMP STATIONS – BELGIUM	BE-AR-OL-PI-TE-NATO
14.	HOLCIM GRANULATS - CEMENT FACTORY – BELGIUM	BE-CE-OL-TE-Holcim
15.	DECLOEDT – DREDGING COMPANY – BELGIUM	BE-OL-MA-TE-Decloedt
16.	HARBOUR OF GENK – BELGIUM	BE-CN-OL-TE-KHG
17.	STORA ENSO PAPER MILL – BELGIUM	BE-OL-PP-TE-Stora Enso
18.	CITY – RAILWAY WAGON – BELGIUM	BE-OL-RW-TE-CITA
19.	J.M. INDUSTRIAL – BELGIUM	BE-AZ-CE-HU-OL-TE-JM-Ind
20.	CARSID – BELGIUM	BE-AZ-HT-OL-TE-Carsid
21.	MARTENS DIRK – AGRICULTURAL MACHINERY	BE-AG-OL-TE-Martens
22.	PUBLIC FOUNTAIN IN GHENT – BELGIUM	BE-OL-PW-TC-TE-Gent fount.
23.	TRACTEBEL – POWER STATION – BELGIUM	BE-CO-EL-OL-TE-Tractebel
24.	VERDEGEM CATTLE FEED COMPANY – BELGIUM	BE-FO-TE-Verdegem
25.	FLUXYS (BELGIAN LARGEST GAS SUPPLIER) – BELGIUM	BE-PE-TE-Fluxys
26.	BASF – CHEMICAL COMPANY – BELGIUM	BE-PE-HU-TA-TE-BASF
27.	VAN BROEKHOVENS – DIESEL STORAGE TANKS – BELGIUM	BE-PE-TA-TE-VanBroekkh
28.	SPX COOLING TECHNOLOGIES – BONNETS OF SRC BUNDLES – BELGIUM	BE-LT-TE-SPX Cooling Technologies
29.	WEST-VLAANDEREN SCHEEPSWERF – BELGIUM	BE-SH-TE-West-VL
30.	FURNAS – ELECTRICITY PYLONS - BRAZIL	BR-EL-PY-TE-Furnas
31.	DORBRAS RAILWAY COMPANY – BRAZIL	BR-RW-TE-Dorbras
32.	TECHNICAL FAIR – BULGARIA	BG-CO-TE-TechnFair
33.	BC FERRY TERMINALS – CANADA	CA-BR-MA-OL-TE-BC Ferry
34.	OVERLANDER BRIDGE – CANADA	CA-BR-OL-TE-Overlander
35.	MINISTRY OF TRANSPORT - QUEBEC	CA-HD-TE-Ministry of transport
36.	CITY OF BURNABY – CANADA	CA-MA-TE-CityofBurnaby
37.	WALT DISNEY – HONG KONG – CHINA	CN-AM-TE-Walt Disney HK
38.	MOBIMETAL – TELECOMMUNICATION PYLONS - CONGO	CD-PY-TE-Mobimetal
39.	EL SALAAM BRIDGE - EGYPT	EG-BR-MA-PI-TE-Salaam
40.	SOCIETE NATIONALE DE CHEMINS DE FER - FRANCE	FR-OL-RW-TE-SNCF
41.	RENAULT - CAR MANUFACTURING COMPANY - FRANCE	FR-CO-OL-TE-TR-Renault
42.	DIRECTION DEPARTEMENTALE DE L'EQUIPEMENT - FRANCE	FR-HD-IM-MA-OL-TE-Sea Buoys
43.	ZINGA ANTICORROSION DISTRIBUTOR - FRANCE	FR-HD-TE-Guerin
44.	DÜSSELDORF HIGHWAY - CRASH BARRIERS - GERMANY	DE-CR-OL-TE-Düss.Highway
45.	STROM UND HAUFENBAU HAMBURG HARBOUR COMPAGNY - GERMANY	DE-OL-PE-TA-TE-Strom
46.	DÜSSELDORF AIRPORT - GERMANY	DE-AP-CO-HD-OL-TE-Düss.Airport
47.	RWE - AG – ELECTRICITY COMPANY - GERMANY	DE-EL-OL-TE-RWE



48.	SCHWENK – CEMENT FACTORY - GERMANY	DE-CE-OL-TE-Schwenk
49.	ABADAN & SHIRAZ REFINERIES - IRAN	IR-OL-PE-TE-Abadan Shiraz
50.	OMRAN SAHEL INSTITUTE – REBARS - IRAN	IR-RE-TE-OmranSahellnst
51.	PARS OIL & GAS CO. – REBARS - IRAN	IR-RE-PE-TE-Pars Oil & Gas
52.	PERLITE CONSTRUCTION SULFUR EXPORT WHARF - IRAN	IR-RE-TE-PerliteConstr
53.	RAHE SAHEL INSTITUTE – REBARS - IRAN	IR-RE-TE-RaheSahellnst.
54.	CHABAHAR PORT – REBARS - IRAN	IR-RE-TE-Chabahar
55.	KILLYBEGS FISHING PIER IMMERSED PIER LEGS - IRELAND	IE-IM-MA-TE-Killybegs pier
56.	MINISTRY OF PUBLIC WORKS - KUWAIT	KW-CO-OL-TE-Ministry of Public Works
57.	MINISTRY OF ELECTRICITY AND WATER - KUWAIT	KW-EL-OL-TE-Ministry of Electricity and Water
58.	KUWAIT OIL COMPANY - KUWAIT	KW-PE-TE-KOC
59.	RYSTRAUM MOTOR SHIP - NORWAY	NO-OL-SH-TE-Rystraum
60.	KALVOYA BRIDGE - NORWAY	NO-BR-MA-OL-TE-Kalvoya
61.	REDE ELECTICA NACIONAL - PORTUGAL	PT-EL-OL-PY-TE-REN
62.	ENERGOPROJECT – TRANSMISSION TOWERS - QATAR	QA-EL-OL-PY-TE-Energ
63.	ELECTRICA - NATIONAL ELECTRICITY SUPPLIER - ROMANIA	RO-EL-OL-TE-Electrica
64.	SNCFR - ROMANIAN RAILWAYS - ROMANIA	RO-OL-RW-TE-SNCFR
65.	SERVSPEC - ROMANIA	RO-TE-Servspec
66.	MUNTENIA – PYLONS - ROMANIA	RO-PY-TE-Muntenia
67.	TELEGONDOLA - ROMANIA	RO-RW-TE-Telegondola
68.	EXXARO KUMBA GROOTGELUK COALMINE – SOUTH AFRICA	ZA-CO-TE-UN-Kumba Mine
69.	FORMOSA PLASTICS COMPANY TRANSMISSION TOWERS - TAIWAN	TW-EL-HD-PY-TE-Formosa
70.	MAERSK CONTAINERS - TAIWAN	TW-TA-TE-Maersk
71.	SHELL PETROCHEMICAL COMPANY - THE NETHERLANDS	NL-MA-PE-TE-Shell
72.	LONDON UNDERGROUND – UNITED KINGDOM	UK-OL-RW-TE-UN-London Underground
73.	DERBY – TURBINE EXHAUST STACKS – UNITED KINGDOM	UK-AZ-HT-OL-TE-Derby
74.	VECTOR INTERNATIONAL – UNITED KINGDOM	UK-MA-NB-PE-TE-Vector
75.	FURMANITE – UNITED KINGDOM	UK-PW-TE-Furmanite
76.	LONDON UNDERGROUND – UNITED KINGDOM	UK-OL-RW-TE-UN-London Underground
77.	US ARMY - UNITED STATES OF AMERICA	US-AR-HD-OL-TE-TR-US Army
78.	MISSISSIPPI DEPARTMENT OF TRANSPORTATION BILOXI BRIDGE – UNITED STATES OF AMERICA	US-AR-BR-TE-MDOT

TP: Tropical environments

1.	TROPICAL ISLAND DOME - GERMANY	DE-TP-Trop Islands
2.	GREENHOUSE - FINLAND	FI-HU-TP-Greenhouse
3.	KENSINGTON PALACE SUNKEN GARDENS – UNITED KINGDOM	UK-AG-AM-CI-TP-Kensington Palace Sunken Gardens
4.	EDEN GREENHOUSE DOME – UNITED KINGDOM	UK-AG-HD-HT-TP-Eden

TR: Trucks and trailers

1.	DANZAS –TRUCK - BELGIUM	BE-TR-Danzas
2.	ICC - TRUCK CHASSIS - BELGIUM	BE-TR-ICC
3.	LAMBREGT - TRUCK CHASSIS - BELGIUM	BE-TR-Lambregt
4.	RENAULT - CAR MANUFACTURING COMPANY - FRANCE	FR-CO-OL-TE-TR-Renault
5.	CARTS TO CONVEY STONES - MOROCCO	MA-TR-Transit trailer
6.	CHASSIS – UNITED KINGDOM	UK-TR-Chassis
7.	US ARMY – UNITED STATES OF AMERICA	US-AR-HD-OL-TE-TR-US Army

UN: Underground



www.zinga.be

1.	CULVERTS - AUSTRALIA	<i>AU-HD-HU-IM-UN-Culverts</i>
2.	KEMPENSE STEENKOOLMIJNEN – PIT COAL MINE - BELGIUM	<i>BE –OL-PI-TE-UN-Kemp.Steenk.</i>
3.	GASCO COMPANY UNDERGROUND PIPELINES - EGYPT	<i>EG-PI-UN-Gasco</i>
4.	LONDON UNDERGROUND – UNITED KINGDOM	<i>UK-OL-RW-TE-UN-London Underground</i>
5.	CULVERTS - UNITED KINGDOM	<i>UK-HD-HU-IM-UN-Culverts</i>
6.	EXXARO KUMBA GROOTGELUK COALMINE – SOUTH AFRICA	<i>ZA-CO-TE-UN-Kumba Mine</i>

WE: Welding

ZC: Zingaceram


1.	POWER PLANTS - TAIWAN	<i>TW-EL-TC-ZC-Power Plants</i>
2.	TAIWAN POWER COMPANY - ZEPHYROS WIND MILLS - TAIWAN	<i>TW-PY-ZC-Zephyros</i>



SLAUGHTERHOUSE CHARLEROI - BELGIUM

Pictures taken before application of ZINGA in 1987.





Free translation of letter dated 21.12.2006
Société de l'Abattoir de Charleroi
Charleroi, 21 December 2006

Dear Sirs,

We confirm that in 1987 we applied ZINGA in 2 layers on steel structures at the inside of our slaughter house and also in the cooling chambers.

As a high humidity degree is available in those areas, the hot dipped galvanised steel was rusting. So we needed to prevent the hot-dipped galvanised steel from further rusting.

Only after more than 20 years a little touch-up was required (see pictures).

Those pictures show that ZINGA has been very efficient even in aggressive and humid area.



It is obvious that ZINGA compared to hot-dipping has a better resistance.

This is why we do not hesitate to express our satisfaction towards ZINGA.


We even recommend this Zinganisation system for several other equipment.

Yours faithfully,

Louis P.
President

	SOCIETE DE L'ABATTOIR DE CHARLEROI S.A.	
--	--	---

TVA : 428.307.458
RC Charleroi : 148.275
SGB : 260-0241128-55



ZINGAMETALL Bvba
Rozenstraat 4
9810 EKE

Charleroi, le 21 décembre 2006

Messieurs,

Nous vous confirmons qu'en 1987 nous avons appliqué le ZINGA en 2 couches sur des structures métalliques à l'intérieur de l'abattoir ainsi que dans les frigos.

Vu la haute teneur d'humidité dans ces locaux, l'acier galvanisé qui se corrodait devait être protégé contre l'extension de la rouille.

Ce n'est qu'après plus de 20 ans qu'il y a lieu de faire quelques petites retouches (voir photos).


Ces photos démontrent que le ZINGA a été très efficace même en milieu agressif et humide.

Il est clair que le ZINGA, comparé à la galvanisation à chaud, a mieux résisté.

C'est la raison pour laquelle nous n'hésitons pas à exprimer notre satisfaction du ZINGA de même que nous conseillons le système ZINGA pour divers autres équipements.

Veuillez agréer, Messieurs, l'expression de nos sentiments distingués.

Pour l'Abattoir de Charleroi


LOUIS P.
Directeur

Place de l'Abattoir, 1 - B-6000 CHARLEROI • Tél. : (071) 41 05 62 / 28 67 00 • Fax : (071) 42 35 18



QUARTES CATTLE FEED COMPANY - BELGIUM

In 1980 ZINGA was used for the recharging of old hot-dip galvanised silos for livestock-feed concentrates and premixes (4 silos, 20 m in height, 4 m in diameter, approx. 4000 m²) at the cattle feed company Quartes (formerly named Versele-Laga). The work was executed with brush and roll.

System:

ZINGA 2 x 60 µm

**N.V. VERSELE-LAGA**

Kapellestraat 70
9800 DEINZE (Belgium)
Tel. 32-9-3813200
Telex 11662
Telefax 32-9-3868513



Zinga Metall
T.s.v. Dhr. Willemot
Industriepark Veneco
Rozenstraat 4

9810 EKE (NAZARETH)

**LIVESTOCK-FEED
CONCENTRATES AND PREMIXES**

Your ref.

Our ref.

HD/SD

DEINZE, May 7, 1996


TESTIMONIAL

We have an experience of over 15 years with **ZINGA** in our factory for several applications of all kinds.

We want to express our entire satisfaction, in particular concerning the application of **ZINGA** on silos, (4 silo's, 20 m in height, 4 m in diameter). These silo's are confronted with a very aggressive environment, because they are situated at the bank of a polluted river with constant humidity.

Till now no maintenance has been necessary. The application was made with a roll/brush by our own maintenance crew. The silo's contain ingredients for cattle food industry and/or fertilizers for agriculture. The temperature of the content varies, which causes a supplementary corrosion speed. We confirm herewith that the Film galvanised system with ZINGA is a cost saving system with a minimum of maintenance. The little maintenance which has been done (on our other applications) was reduced to a minimum due to the fact that only water cleaning (pressure) was necessary before we could touch up and reload the old and weathered zinganised structures.

H. DESSOMVIELE
Technical Director

**SGS****REPORT**

Mr. Guy WILLEMOT
ZINGAMETALL BVBA
Industriepark Veneco
Rozenstraat 4
9810 EKE - NAZARETH
BELGIUM

Date:
22/05/2003

Our reference:
1496-01-0883 E-2003

Your Reference:
Verbal 09/05/03

Type of intervention	SURVEY REPORT
Object	4 silo's for grain / flour storage
Location	Quartes (ex Versele-Lagae nv) at Deinze
Date inspection	13/05/03
Time inspection	14:30

3.2. Measurements of D.F.T.

ELCOMETER BATCH NR./OBJECT ↓		Layer	Average DFT (µm)	% < Abs.Min	% > Min	OK/NOK
F1	QUARTES SILO 1	2/2	194	0	100	OK
F2	QUARTES SILO 2	2/2	155	0	100	OK
F3	QUARTES SILO 3	2/2	171	0	100	OK
F4	QUARTES SILO 4	2/2	162	0	100	OK

Remarks: On top of the coating, some grow of fungi were stated.


3.3. Adhesion testing (Evaluation conform ASTM D-3359-A, par.7).

Item : Silo n° 2
Layer : 2/2
Result : OK
Remarks : Good adhesion.

3.4. Visual aspect (covering, closed film, holidays, runners, curtains..)

All silos do not show any rust spots on the flat surfaces and rivet connections.
Small areas with corrosion were stated at the backsides of the manhole entrances.
This should be touched-up in order to prevent further breakdown.

In May 2003, 23 years after the application, the silos were officially inspected by SGS Axa-Med. As you can see, the dry film thickness was still more than sufficient and the adhesion was perfect. The silos did not show any rust, except at small areas at the backside of manhole entrances. Some minor touch-ups had to be done, but there was absolutely no need for a complete maintenance.



In June 2009, 29 years after the application, the silos were again visited.

As you can see, 29 years after application there is still no rust to be found on the surface.

There is only a slight coloration on the surface caused by algae being able to survive because of the humid environment the silos are in.

As you can see on the picture on the right hand side, ZINGA is still holding strong.

Scratching the surface using a coin and key was not enough to get to the metal beneath. It simply showed the zinc colour from ZINGA under the layer of zinc salts.



SLAUGHTERHOUSES GOOSSENS - BELGIUM

The metal structures at **GOOSSENS** Slaughterhouses have been treated with ZINGA as a unique systems in 1989 -1990.

**System:**

ZINGA 2 x 60 µm

ZINGA is an important cost saver when used in cooling chambers. It is applied directly on the old, weathered and even rusty structures, in very cold circumstances. The slaughterhouse is not obliged to shut down and to warm these cooled areas in order to obtain a temperature that is necessary for traditional coating systems, which is of course very economic.

During recent visit of the slaughter house and the evaluation of its manager Mr. Goossens “**May 2008**” he confirms his full satisfaction of the behaviour of ZINGA during all these years and still is consumer for extensions, on top of this “the ZINGA” in his first cooling chamber is still in good shape and this after so many years (almost 20 years).



SILOS DE COCK – BELGIUM

The cattle feed company De Cock uses ZINGA to reload old hot-dip on grain silos and other structures. The photos were taken in August 2004.



System :

ZINGA 2 x 60 µm

before



before

after



COCA COLA - BELGIUM

In January 2002, an outside storage tank of the company Coca Cola in Wilrijk was treated with ZINGA.




Both the roof and the stairway of the tank showed traces of corrosion.



System :

ZINGA 2 x 60 µm

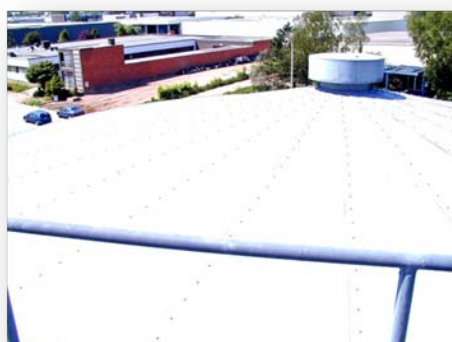

**SNACK FOODS VEURNE - BELGIUM**

These are pictures of the surface preparation and ZINGA application on a tank at the company Snack Foods in November-December 2002.

The whole tank was grit-blasted.



Before application



During application



After application



The whole tank was insulated
after the application.

System:

ZINGA 2 x 60 μ m



DAIRY FARM VITEBSK - BELARUS



This is a dairy farm in the region of Vitebsk in Belarus where ZINGA was applied in the year 2005 - 2006.

This is one of the many farms of this kind in Belarus where ZINGA has been chosen as anti-corrosion system for beams, fences, cages and other metal structures.



System:

ZINGA 2 x 60 µm



Surface preparation:
Grit-blasting SA 2,5
and Ra 15-20 µm

Application:
Air spraying





CATTLE- AND PIGFARM - FINLAND

ZINGA has been used in pig farms already for nearly 15 years:
in re-coating existing galvanised surfaces and in recent years also using ZINGA as
the only coating system.

Surfaces are sandblasted to at least SA 2,5 and ZINGA is applied:

- to normal areas 1 x 50 μ m DFT
- fittings at floor level are treated with 3 to 4 layers of 50 μ m which offers an even longer lasting surface.

ZINGA clearly offers better durability than a hot-dip galvanised surface.

Also supervision and re-treatment of the anti-corrosion protection of the object is simple when using ZINGA.



System:

ZINGA 1 to 4 x 50 μ m



YUZHNY GREENHOUSE FARM - RUSSIA


Yuzhny Greenhouse Farm is the largest European greenhouse farm of its kind. It is situated in Cherkessk Stavropol region, Russia.

The total area of the glass covered houses is over 144 hectares.



Conditions of exploitation inside the greenhouse:

- temperature: 20 to 30°C - humidity: 80%

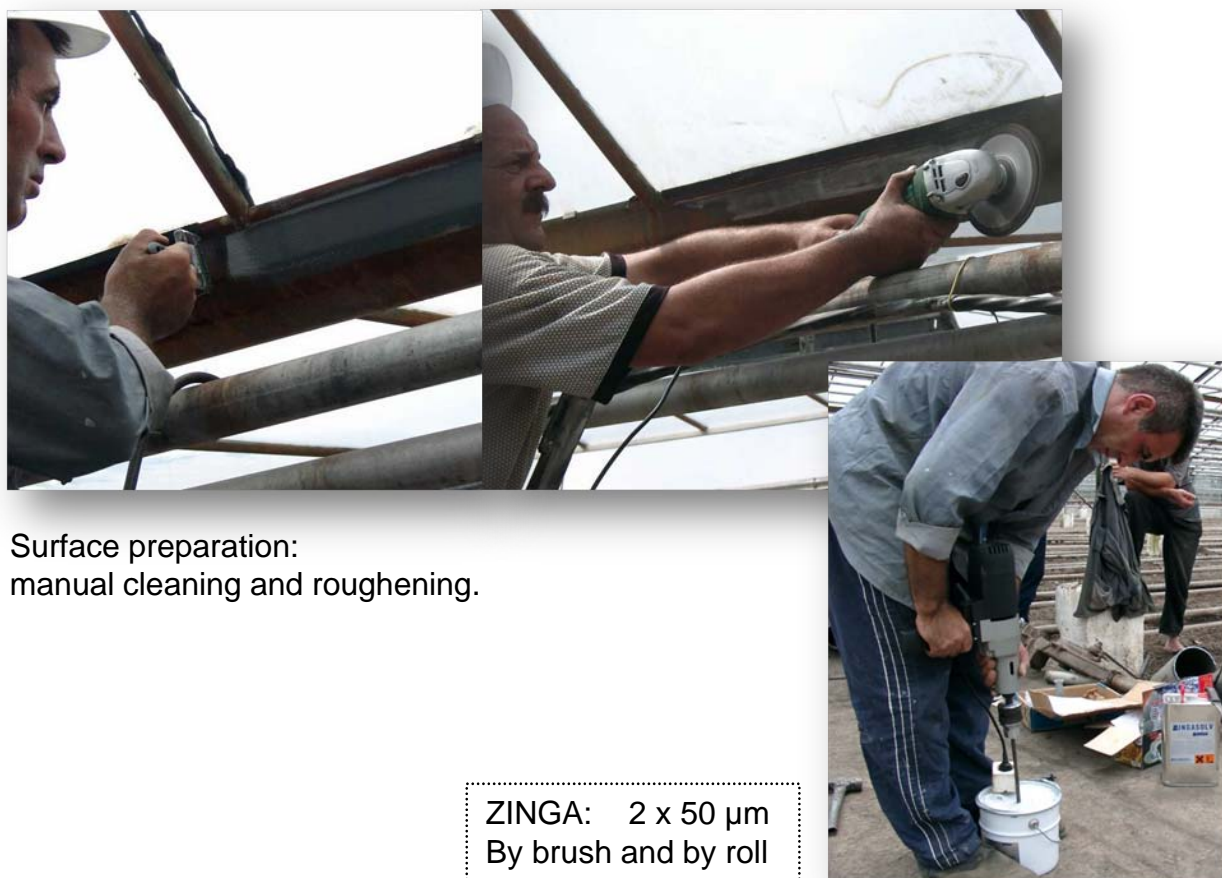

Surface preparation:
manual cleaning and roughening.

ZINGA: 2 x 50 µm
By brush and by roll

The metal structures used as support were originally hot-dipped. Late in July 2003, the previously hot-dipped coating of the metal structures was repaired or restored by means of ZINGA. At the first stage 5 tons of ZINGA were already supplied. The applications continued until August/September 2003.

EDEN GREENHOUSE DOME – UNITED KINGDOM

The Eden Greenhouse Dome is a botanical, biological theme park in St. Austel. It is the biggest greenhouse in Europe for plants and insects from tropical countries. The constant heat and humidity were the reasons for choosing hot-dip and ZINGA instead of conventional paint systems. Opening date: 01/06/2001.



For aesthetic reasons, ZINGA was overcoated with a vinyl aluminium paint.

ZINGA was used to repair the hot-dip galvanising layer (damaged during transport and assembling).

System:

ZINGA

1 x 60 µm

Vinyl Aluminium Paint



Traduction du rapport de l'
INSTITUT BIO RECHERCHE ALIMENTAIRE
du 29.03.2005

Pour : SC. Bellrom '95

Att. : Mr Eug. Soreanu Adrian

Le système de protection contre la corrosion « ZINGA » a été testé en vue de l'application sur des surfaces métalliques utilisées dans l'industrie alimentaire. Le test a été réalisé suivant l'Ordre du Ministère de la Santé (= arrêté Ministériel de la Santé) n° 975/1998 et la réglementation italienne D.M. nr 21/3/1973 et les amendements concernant les matériaux et les ustensiles destinés à entrer en contact avec les aliments. La norme italienne est utilisée couramment dans la Communauté Européenne pour tester les matériaux de protection contre la corrosion.

Les normes en question imposent de déterminer la stabilité chimique et l'absence totale de toxicité du matériau qui pourrait entrer en contact avec les produits alimentaires par un test d'émigration globale, émigration spécifique des composants dans les liquides modèles d'extraction (simulant les aliments).

Dans le rapport des essais N° 904/2005 on trouve les valeurs des indicateurs spécifiques obtenues avec le rapport extraction 1:10 dans les conditions suivantes :

24 heures à 40 ° C dans l'eau distillée
24 heures à 40 ° C en solution d'acide acétique 3 %
24 heures à 40 ° C en solution d'alcool éthylique 15 %
24 heures à température ambiante de la chambre en solution d'iso-octane

Les valeurs des indicateurs testés restent dans les limites imposées par l'ordre M.S. Nr 975/1998 et les directives européennes qui sont la base de notre procédure d'analyse. Aux vues des résultats présentés on recommande l'utilisation du système de protection « ZINGA » pour le recouvrement des surfaces métalliques utilisées dans l'industrie alimentaire (pour viandes, préparation de viande, autres produits solides, ainsi que produits liquides : eau, huile, alcool.

Elaboré par le Chef Laboratoire Emballage, Ing. Mariana Ionescu

Free translation report

Biological Institute for Food Research
29.03.2005

Anti corrosion system ZINGA® has been tested in order to be applied on metal surfaces used in the food industry. The test has been effected according the rules of Ministry of Health n° 975/1998 and the Italian Standard DM n° 21/3/1973 and the amendments regarding material and tools destined to be used in contact with food. The Italian Standard is often used in the EEC for testing protection materials against corrosion.

To meet the Standard the chemical stability and exemption of toxic products in the material that could be in contact with food is a must and is executed with a total emigration test, a specific emigration test of the components in extraction of liquid (simulating food).

In test report n° 904/2005 one can find values of specific indicators obtained with extraction report 1:10 as follows :

24 hours at 40 °C in distilled water
24 hours at 40 °C in a solution of acetic acids of 3 %
24 hours at 40 °C in a solution of ethyl alcohol of 15 %
24 hours in room temperature in a solution of iso-octane

The values of the tested elements stayed between the limits imposed by the order M.S. N° 975/1998 and the European directives that underlie the foundation of our procedure analysis.

According the results we recommend the application of Zinga to cover the steel structures used in food industry (for meat, preparation of meat, other products, such as liquid products : water, oil and alcohol.

Effected by Head Laboratory of Packing, Ing Mariana Ionescu

MAR-2005 10:54 FROM: ANSV 3278683

TD: +40244576019

P: 1

ROMANIA



**AUTORITATEA NATIONALA SANITARA VETERINARA
SI PENTRU SIGURANTA ALIMENTELOR
DIRECTIA GENERALA SANITARA VETERINARA**

Bucuresti, Str. Negustori, nr. 9B, et. 2, cod postal 023951; tel: 2167875, fax: 2124807, e-mail: office@ansv.ro

Nr. 30987/9.03.2005

SC BELROM 95 SRL

Domnului Director General Ing. Adrian SOREANU

Fax : 0244576019

Răspuns la adresa dumneavoastră nr. 351/2005, înregistrată la A.N.S.V.S.A. sub nr. 30987/2005, prin care solicitați aprobarea efectuării de lucrări de acoperire anticorozivă cu produse de protecție catodică (zincare la rece) ZINGA în incinta abatoarelor, vă informăm următoarele :

- În vederea obținerii aprobării utilizării diferitelor substanțe sau materiale în incinta unităților de industrie alimentară trebuie să vă adresați Ministerului Sănătății.
- Utilizarea produselor anticorozive de acest tip în incinta abatoarelor este permisă numai pentru suprafețele care nu intră în contact direct cu carnea.

DIRECTOR GENERAL

G. Predoi
Prof. Univ. Dr. Gabriel PREDOI





Canadian Food Inspection Agency
Agence canadienne d'inspection des aliments
Food Safety Directorate
3851 Fallowfield Road
Ottawa, Ontario, Canada
K2H 8P9

Tel: (613) 228-6698
Fax: (613) 228-6675

Direction de la sécurité alimentaire
3851, chemin Fallowfield
Ottawa (Ontario) Canada
K2H 8P9

Tél: (613) 228-6698
Télécopieur: (613) 228-6675

Date: 04/09/28

File/Dossier: # G196

Monsieur Laurier Rioux
Directeur général
Galvatech 2000, 2859-4521 Québec Inc.
297, rue Gendron
C.P. 123
St-Léon-le-Grand (Québec)
G0L 2W0

RE: G196 Galvatech 2000, 2859-4521 Québec Inc.
St-Léon-le-Grand (Québec) G0L 2W0
04/09/28 d1, d3 Zinga

This will acknowledge your submission dated 04/08/30, concerning the aforementioned construction material for which you have requested acceptance for use in food processing facilities.

Upon reviewing the physical and chemical data, the product Zinga would appear satisfactory.

Therefore, no objection will be taken to the use of the above construction material in food facilities on walls, ceilings and structural members, with the understanding that it is used in keeping with the manufacturer's recommendations for application and the Canadian Food Inspection Agency requirements.

Nous accusons réception de votre soumission datée du 04/08/30, concernant le produit cité en rubrique pour lequel vous demandez une acceptation pour utilisation dans les établissements de transformation alimentaire.

Évalué sur la base de ses caractéristiques physiques et chimiques, le produit Zinga semble satisfaisant.

Par conséquent, nous avons aucune objection à l'utilisation du matériau de construction ci-haut mentionné dans les établissements alimentaires sur les murs, les plafonds et les structures, à condition qu'il soit utilisé conformément aux recommandations d'application du fabricant et des exigences de l'Agence canadienne d'inspection des aliments.

In order to avert possible adverse organoleptic effect in foods which will be processed in areas where the construction material will be used, adequate precautions respecting ventilation should be taken to assure volatile constituents in the construction material will not contaminate the foods.

This acceptance of the construction material will depend upon its continued acceptability to all concerned.

Should any changes occur in the chemical formulation of the aforementioned construction material, then this acceptance will be considered **NULL and VOID**.

Yours truly,


Afin de prévenir la possibilité d'effets organoleptiques négatifs dans les aliments préparés dans les endroits où le matériau de construction sera utilisé, il faudra prendre toutes les précautions afin de s'assurer que les constituants volatils du matériau ne contaminent pas les aliments.

L'acceptabilité du matériau de construction sera conditionnelle à la satisfaction de toutes les parties intéressées.

Cette acceptation sera considérée comme **NULLE et SANS EFFET** si l'on procède à une modification quelconque dans la formulation chimique du matériau de construction ci-haut mentionné.

Je vous prie d'agréer l'expression de nos sentiments les meilleurs.

Spécialiste de programme technique
Section de l'analyse des risques alimentaires
Direction de la sécurité alimentaire


Bernard Dallaire
Technical Program Specialist
Food Safety Risk Analysis Unit
Food Safety Directorate

**NATIONAL INSTITUTE OF PUBLIC HEALTH****DEPARTMENT OF ENVIRONMENTAL HYGIENE**

Chocimska Street 24 00-791 Warsaw ; Phone (22) 5421354; Fax (22) 5421287; e-mail:sek-zhk@pzh.gov.pl

HYGIENIC ATTEST: HK/W/0416/01/2008

Product: **Compound ZINGA**

Containing: **electrolytic zinc, binder**

Destined for: **covering the inner surfaces of steel containers designed to store potable water**

The above mentioned product is acceptable according to hygienic criteria with the following conditions:

The compound destined for professional use. Each container covered with the compound must be painstakingly washed with water.

There must be a label in Polish on the packaging, which should include recommendations concerning precautions – as in Safety Data Sheet of the product, in accordance with the proper law regulations.

The product should be kept out of children's reach.

Producer: Zingametall b.v.b.a.
B-9810 Eke
Rozenstraat 4, Belgium

This certificate issued for:

ZINGAMETALL POLAND s.c.
Dionizy Wiśniewski, Mirosława Wiśniewska
87-100 Toruń, ul. Grudziądzka 151

The attest may be corrected or cancelled after receiving a proper proof by any side or in the case of changes made in composition or in technological production process.

The document's validity : 2013-08-20

Date of issue: 20 August 2008

Kierownik
Zakładu Higieny Komunalnej

Dr Janusz Świątczak

Our Ref: RW/M5345

12/03/2008



Zinga UK
3 Arkwright Way
North Newmore
Irvine
KA11 4JU

Dear Sir

**WATER REGULATIONS ADVISORY SCHEME
"ITEMS WHICH HAVE PASSED FULL TESTS OF EFFECT ON WATER QUALITY - BS 6920"**

We refer to your application for the material(s) described below to be approved arising from the results of the tests of effect on water quality that have been carried out on the product(s) so described, it has been decided that there is no objection to its/their use provided the source, nature and manufacturing processes of the ingredients and products are not changed. (See notes overleaf).

COATINGS, PAINTS & LININGS - SITE APPLIED TANK COATINGS

5046

Zinga. Grey coloured zinc coating. Cold water use only.

Test Report: M 104127

0711521

ZINGA UK

An entry, as above, will accordingly be included in the Water Fittings Directory on-line, Part Two, under the section headed, "Materials which have passed full tests of effect on water quality".

Your attention is drawn to the statement overleaf. Manufacturers or applicants may only quote in their sales literature terms which are used in this letter, namely that the product as listed, having passed the tests of effect on water quality, is suitable for use in contact with potable water and that a reference to the product will be included in the Materials section, Part Two, of the Water Fittings Directory on-line: this may be abbreviated to "Water Regulations Advisory Scheme - Approved Material" or "WRAS - Approved Material". **Approval of this product does not signify the approval of its mechanical or physical properties for any use.**

The Technical Committee of the Scheme reserves the right to review approval. This product automatically becomes due for audit reassessment in November 2012.

Yours faithfully

A handwritten signature in dark ink that reads 'R L Williams'.

Rebecca Williams
Materials Approval
Water Regulations Advisory Scheme



MATERIALS WHICH HAVE PASSED FULL TESTS OF EFFECT ON WATER QUALITY AND ARE USED IN THE MANUFACTURE OF WATER FITTINGS AND WATER INSTALLATIONS AND IN THEIR ASSEMBLY, CONNECTION, DISCONNECTION AND REPAIR.

The material or product referred to in this letter is suitable for contact with, and for the manufacture of components of water fittings for use in contact with water for domestic purposes. The reference relates solely to its effect on the quality of the water with which it may come into contact and does not signify the approval of its mechanical or physical properties for any use. Certain products are approved in the full knowledge that for many plastic materials and natural and synthetic rubbers, variations in curing times and temperatures may have a significant effect on water quality. The right is reserved to require the testing of components made from any of these materials before listing those components if the scheme has any reason to believe that they differ from the materials originally tested and listed.


Entries in the Directory on-line relating to components made from listed materials are included on the understanding that the components are made of precisely the same materials as the test samples without any modification and without the addition or substitution of any ingredients, and that, as applicable, the curing times and temperature shall be as nearly as possible those recommended by the manufacturers of the materials or products and used for the production of test samples.

In order to avoid their affecting water quality, materials must be allowed to cure at the correct temperature for the necessary length of time. This cannot always be achieved where materials are mixed on site, often in approximate proportions, and cured in situ often under cold, ill-ventilated conditions. Entries relating to products or products produced under properly controlled factory conditions, cannot be guaranteed to apply to site conditions.

Water Regulations Advisory Scheme
30 Fern Close, Pen-y-Fan Industrial Estate,
Onddale, Gwent NP23 7ED, UK

Tel: 01495 248454 Fax: 01495 249234
E-mail: info@wras.co.uk Website: www.wras.co.uk

WRAS Ltd
Registered in England No. 0174766
Registered Office: Pen-y-Fan Industrial Estate,
Onddale, Gwent
Company No. 0174766

**FURMANITE – UNITED KINGDOM**

This is a fax message from the company Furmanite, dated 09/01/01, addressed to the company Bon Accord in the UK, concerning the use of ZINGA as anti-corrosion protection for applications in contact with potable water.

Especially the fact that Zinga is a time-saving product, is important for the customer.

fax

Furmanite International Limited
Furman House, Sharp Road
Kendal, Cumbria LA9 6RU, United Kingdom
Tel: 01539 729009 Fax: 01539 729339
Mail: uk.enquiry@furmanite.com
Internet: <http://www.furmanite.co.uk>

FURMANITE
A KANES COMPANYfax to BON ACCORD METAL SUPPLIES LTDattention of BILL DOWNIE

cc _____

fax no. 01224 873730 ref number _____from DOMINIC DEANdate 09/01/2001 no. of pages (including cover) 1**ZINGA COATING.**

Bill,

The ZINGA is going well. We have been using it, at our Carlisle factory, instead of nylon coating for drinking water applications. This has meant Aero can supply a coated enclosure with a considerable time saving between finishing fabrication/machining and being delivered to site

However, I do need a Material Safety Data Sheet for it so I can finish off the COSHH assessment for the material.

Please can you supply me with one?

Regards
For Furmanite International Limited

Dominic Dean
Manager – Materials Technology

System :

ZINGA

2 x 60 µm



ZINGA

ZM-RE-PRO-04-A (01/08/06)

The film galvanising system Zinga is a one pack coating that contains 96% zinc in the dry film and provides cathodic protection to ferrous metals. It can be used as a unique system as an alternative to hot-dip galvanisation or metallisation, as primer in a duplex system or as a recharging system for hot-dip galvanisation or metallisation. It can be applied by brushing, rolling or spraying on a clean and rough substrate in a wide range of atmospheric circumstances. Zinga is also available as an aerosol and is sold as Zingaspray.

Physical data and technical information

• Wet product

Components	- zinc powder - aromatic hydrocarbons - binder
Density	2,67 Kg/dm ³ (± 0,06 Kg/dm ³)
Solid content	- 80% by weight (± 2%) - 58% by volume (± 2%) according to ASTM D2697
Type of thinner	Zingasolv
Flash point	≥ 40°C to < 60°C
VOC	474 gr/Lt (EPA method 24) (= 178g/Kg)

• Dry film

Colour	matt metallic grey (colour darkens after contact with humidity)
Zinc content	96% (±1%) by weight, with a purity of 99,995% Zinga gives full cathodic protection and conforms to the standard ISO 3549 in regard to its zinc purity of 99,995 % and to the standard ASTM A780 in regard of its use as repair coating for hot-dip galvanisation.
Special characteristics	- atmospheric temperature resistance - minimum : -40°C - maximum : 120°C with peaks up to 150°C - pH resistance in immersion: from 5,5 pH to 9,5 pH - pH resistance in atmospheric circumstances: from 5,5 pH to 12,5 pH - excellent UV resistance
Non-toxicity	A dry layer of Zinga is not toxic and can be used in contact with potable water, according to the standard BS 6920.



- **Packing**

500 ml	aerosol
1/4 Kg	available as sample (on request)
1 Kg	available, packed in undividable boxes of 12 x 1 Kg
2 Kg	available, packed in undividable boxes of 6 x 2 Kg
5 Kg	available
10 Kg	available
25 Kg	available

- **Conservation**

Storage	store in a cool and dry place
Shelf life	unlimited In case of long time storage it is recommended to shake the unopened tin in an automatic shaker at least once every 3 years.

Application data

- **System recommendations**

Unique system	<ul style="list-style-type: none">- Zinga is used as a stand-alone system, applied in 2 or 3 layers to obtain a total maximum DFT* of 120 to 180 µm.- This system is strongly recommended because of the easy maintenance. In time the layer will become thinner as the Zinga sacrifices itself due to the cathodic protection. A new layer of Zinga can be directly applied once the surface has been properly cleaned and it will re-liquidise and recharge the previous Zinga layer. The DFT of Zinga that should be applied depends upon the remaining Zinga layer.- The system Zinga 2 x 60 µm DFT conforms to the standards: NORSOK M-501 syst. 7 ISO 12944-6: 2 x 60µm DFT ZINGA: C4-High, C5M-Medium and C5I-Medium 2 x 90µm DFT ZINGA: C5M-High and C5I-High
Duplex system	<ul style="list-style-type: none">- In a duplex system, Zinga should be applied in one single application, preferably by spraying, to obtain a maximum DFT of 60 to 80 µm.- The surface of the Zinga should be free of zinc salts and other contaminations prior to application of a topcoat.- Zinga can be topcoated with a wide range of compatible sealers and topcoats. To avoid pinholes when topcoated, use the mist coat & full coat technique (meaning a standard diluted coat of 25 to 30µm DFT followed by a full coat of the same product).
Stripe-coat	It is recommended to apply a stripe-coat of Zinga by brush on all sharp edges, nuts and bolts and weld areas before the application of the first full layer of Zinga.
Recharging system	Zinga can be applied on top of a hot-dip galvanising layer, a metallisation layer or an old Zinga layer in order to renew or enhance the cathodic protection. The DFT of Zinga that should be applied depends upon the existing galvanising layer.

*DFT & WFT : dry film thickness and wet film thickness ; to be measured **above the peaks** of the roughness profile



- **Coverage and consumption**

Theoretical consumption	- for 60 µm DFT : 0,28 Kg/m ² or 0,10 Lt/m ² - for 120 µm DFT : 0,55 Kg/m ² or 0,21 Lt/m ²
Theoretical coverage	- for 60 µm DFT : 3,62 m ² /Kg or 9,67 m ² /Lt - for 120 µm DFT : 1,81 m ² /Kg or 4,83 m ² /Lt
Practical coverage	depends upon the roughness profile of the substrate and the application method

- **Environmental conditions during application**

Ambient temperature	- minimum -15°C - maximum 40°C
Relative humidity	- maximum 95%
Surface temperature	- minimum 3°C above the dew point - no visual presence of water or ice - maximum 60°C
Product temperature	During application the temperature of the Zinga liquid must remain between 15 and 25°C. A lower or higher temperature of the product will influence the smoothness of the film when drying.

- **Drying process and overcoating**

Drying process	Zinga dries by evaporation of the solvent. The drying process is influenced by the total WFT, the number of coats applied, the ambient air and surface temperatures and the air circulation.
Drying time	for 40 µm DFT at 20°C in a well-ventilated environment: - touch-dry: after 10 min. - dry to handle: after 1 hour - fully cured: after 48 hours - ready for immersion: after 2 hours
Overcoating	- with a new layer of Zinga : - brush : 2 hours after touch dry - spray gun : 1 hour after touch dry - with a compatible paint : after 6 to 24 hours depending on the drying conditions
Reliquidisation	Each new layer of Zinga reliquidises the former Zinga layer so that both layers form one homogeneous layer.



Instructions for use

- **Surface preparation**

Cleanliness	<ul style="list-style-type: none">- The most common method to obtain a clean (and at the same time rough) surface for the application of Zinga is: The metal substrate should first be degreased, preferably by steam-cleaning at 140 bar at 80°C. After that it should be grit-blasted or slurry-blasted to cleanliness degree SA 2,5 according to the standard ISO 8501-1 or to the cleanliness degree described in the standards SSPC-SP10 and NACE nr 2. This means that the surface must be free from rust, grease, oil, paint, salt, dirt, mill scale and other contaminants. Once the grit-blasting is completed the surface should be de-dusted with non contaminated compressed air according to the standard ISO 8502-3 (class 2) or in case of slurry-blasting the surface should be dried with non-contaminated compressed air.- Another method to obtain a clean surface is UHP water-jetting to cleanliness degree WJ2 according to the standards NACE nr 5 and SSPC-SP12 level SC1. But keep in mind that this method does not create surface roughness.- This high degree of cleanliness is not needed when Zinga is applied on a hot-dip galvanisation or a metallisation layer, or when it is applied on top of an existing Zinga layer. Please consult with the Zingametall representative.- For substrates that will not be immersed Zinga can be applied on mild flash rust (FWJ-2) occurring in the allowed time limit. For applications that will be immersed Zinga can only be applied on an SA 2,5 prepared surface with contaminants to NACE No5/SSPC SP-12 level SC1 unless otherwise agreed with the Zingametall representative.- On small areas or on non-critical applications Zinga can be applied on a surface that is manually prepared to degree St 3 according to ISO 8501-1. Please consult with the Zingametall representative.
Roughness	<ul style="list-style-type: none">- Zinga should be applied on a metal substrate that has roughness degree Rz 50 to 70 µm (for total DFT < 280 µm) or Rz 60 to 80 µm (for total DFT > 280 µm) according to the standard ISO 8503-2. This can be obtained by grit-blasting (with sharp particles) but not by shot-blasting (with spherical particles). Make sure that the surface is degreased before the grit-blasting.- This high degree of roughness is not needed when Zinga is applied on a hot-dip galvanisation or a metallisation layer, or when it is applied on top of an existing Zinga layer. Please consult with the Zingametall representative.- On small areas or on non-critical applications Zinga can be applied on a surface that is manually prepared e.g. with a needle gun or a grinding disk, in order to obtain an adequate roughness for Zinga. Please consult with the Zingametall representative.



Maximum time to application	Apply the Zinga as soon as possible on the prepared surface. - in dry circumstances : depending on the location - in case of water-cleaning or if the relative humidity is close to 80%: max. 4 hours waiting time If contamination occurs before coating, the surface must be cleaned again as described above. Flash rust can be removed by means of a wire brush.
-----------------------------	--

- Special instructions**

Stirring	- Zinga must be thoroughly stirred to achieve a homogeneous liquid before application. After a maximum of 20 min. re-mixing is necessary. - During the spraying application, the product must be stirred continuously.
----------	---

Dilution	Zinga can be diluted with 0 to 5% (volume on volume) of Zingasolv when using airless spray equipment and 0 to 25% for air supported applications. The Zingasolv must be added whilst stirring.
Rinsing of tools and equipment	Before and after using the spraying equipment, it must be rinsed with Zingasolv. Brushes and rollers should also be cleaned with Zingasolv. Never use White Spirit.
Special demands for spraying equipment	- Pour the Zinga through a filter of 100 mesh (150 µm) into the drum. - For the spraying of Zinga, it is better to remove all filters from the pistol and from the drum to avoid blockage. - The spray gun must be equipped with reinforced needle springs.

- Application by brush and roller**

Viscosity	Zinga is ready for use when applied by brush or roller. Do not dilute.
First layer	The first layer must never be applied by roller, only by brush, in order to fill the cavities of the roughness profile and to wet the surface.
Type of brush and roller	- short hair roller (mohair) - industrial round brush

- Application by spraying with spray gun with gravity cup**

Dilution	0 to 25% (volume on volume)
Spray viscosity	25 to 35 sec. Ford cup nr. 4 at 20°C
Pressure at the nozzle	2 to 4 bar
Nozzle opening	1,7 to 2,5 mm

- Application by spraying with spray gun with pressure pot**

Dilution	0 to 25% (volume on volume)
Spray viscosity	25 to 35 sec. Ford cup nr. 4 at 20°C
Pressure at the nozzle	3 to 4 bar
Pot pressure	0,8 to 1,5 bar
Nozzle opening	1,7 to 2,5 mm



- **Application by airless spraying**

Dilution	0 to 5% (volume on volume)
Pressure at the nozzle	± 150 bar
Nozzle opening	± 0,03 inch

- **Other application methods**

Please consult with the Zingametall representative.

For more specific and detailed recommendations concerning the application of Zinga, please contact the Zingametall representative. For detailed information about the health and safety hazards and precautions for use, please refer to the Zinga **safety data sheet**.

Waiver*

* The information on this sheet is merely indicative and is given to the best of our knowledge based on practical experience and testing. The conditions or methods of handling, storage, use or disposal of the product cannot be controlled by us and are therefore outside our responsibility. For these and other reasons we retain no liability in case of loss, damage or costs that are caused by or that are linked in any way to the handling, storage, use or disposal of the product. Any claim concerning deficiencies must be made within 3 months upon reception of the goods quoting the relevant batch number. We retain the right to change the formula if properties of the raw material are changed. This data sheet replaces all former specimens.



ALU ZM

ZM-RE-PRO-04-A (01/08/06)

Alu ZM is a quick drying one pack coating based on aluminium flakes. It can be applied either without primer on an old, non-corroded hot-dip galvanisation or metallisation layer or as topcoat on top of Zinga. It can be applied by brushing or spraying in a wide range of atmospheric circumstances. Alu ZM is mainly applied for esthetical reasons as it gives a nice aluminium aspect and has a good chemical resistance which allows it to be used in industrial environments.

Physical data and technical information

- **Wet product**

Components	- aluminium powder - aromatic hydrocarbons - binder
Density	1,01 Kg/dm ³ (± 0,05 Kg/dm ³)
Solid content	- 35% (± 2%) by weight - 25% (± 2%) by volume
Type of thinner	Zingasolv (does not contain xylene or MEK)
Flash point	≥ 40°C to < 60°C

- **Dry film**

Colour	aluminium
--------	-----------

- **Packing**

1 L	available, packed in undividable boxes of 6 x 1 L
2,5 L	available
15 L	available

- **Conservation**

Storage	store in a cool and dry place
Shelf life	unlimited In case of long time storage it is recommended to shake the unopened tin from time to time.



Application data

• System recommendations

As topcoat on Zinga	Alu ZM can be applied in 1 layer of 40 to 60 µm DFT as topcoat (by airspray or airless) on top of the anti-corrosion system Zinga on a metal substrate. Even though we always recommend maximum 60 µm DFT for Zinga in a duplex system, in combination with Alu ZM, the maximum layer thickness of Zinga is 120µm DFT in 1 layer applied by airless.
Stripe-coat	We recommend applying a stripe-coat of Alu ZM by brush on all sharp edges, nuts and bolts and welding areas before the application of the first full layer of Alu ZM.

• Coverage and consumption

Theoretical consumption	- for 40 µm DFT : 0,16 L/m ² - for 80 µm DFT : 0,32 L/m ²
Theoretical coverage	- for 40 µm DFT : 6,19 m ² /L - for 80 µm DFT : 3,09 m ² /L
Practical coverage	depends upon the application method

• Environmental conditions during application

Ambient temperature	- minimum -15°C - maximum 40°C
Relative humidity	- maximum 95%
Surface temperature	- minimum 3°C above the dew point - no visual presence of water or ice - maximum 60°C

• Drying process and overcoating

Drying process	Alu ZM dries by evaporation of the solvent. The drying process is influenced by the total WFT, the number of coats applied, the ambient air and surface temperatures and the air circulation.
Drying time	for 40 µm DFT at 20°C in a well-ventilated environment with at least 60% relative humidity : - touch-dry : after 25 min. - dry to handle : after 1,5 hour - fully cured : after 24 hours
Overcoating	- with a new layer of Alu ZM : 1 hour after touch dry - Any intermediate coat contamination that could disturb the adherence of the next coat should be removed by appropriate cleaning.
Reliquidisation	Each new layer of Alu ZM reliquidises the former Alu ZM layer so that both layers form one homogeneous layer.



Instructions for use

• Surface preparation

Cleanliness	- When Alu ZM is applied on top of Zinga, the surface should be free of zinc salts and other contaminations. That means that the Alu ZM must be applied within 24 hours after the application of the Zinga. In case the application of the Alu ZM can only be done after 24 hours, the Zinga surface should first be washed preferably by steam-cleaning at 140 bar at 80°C.
Roughness	When Alu ZM is applied on top of a new hot-dip galvanisation layer, the surface should be roughened by blasting with wet inert product, by using Scotch Brite or a nylon brush.
Maximum time to application	Apply the Alu ZM as soon as possible on the prepared surface. - in dry circumstances : max. 24 hours waiting time - if the relative humidity is close to 80% : max. 4 hours waiting time If contamination occurs before coating, the surface must be cleaned again as described above.

• Special instructions

Stirring	- Alu ZM must be thoroughly stirred to achieve a homogeneous liquid before application. After a maximum of 20 min. re-mixing is necessary. - During the spraying application, the product must be stirred continuously.
Dilution	Alu ZM can only be diluted with Zingasolv.
Rinsing of tools and equipment	Before and after using the spraying equipment, it must be rinsed with Zingasolv. Brushes should also be cleaned with Zingasolv. Never use White Spirit.

• Application by brush

Viscosity	Alu ZM is ready for use when applied by brush. Do not dilute.
Type of brush	- industrial round brush



- **Application by spraying with spray gun with gravity or suction cup**

Viscosity	10 to 20% Zingasolv (volume on volume)
Pressure at the nozzle	2 to 4 bar
Nozzle opening	1,4 to 1,8 mm

- **Application by spraying with spray gun with pressure pot**

Viscosity	10 to 20% Zingasolv (volume on volume)
Pressure at the nozzle	2 to 4 bar
Pot pressure	0,8 to 1,5 bar
Nozzle opening	1,4 to 1,8 mm

- **Application by airless spraying**

Dilution	0 to 5% (volume on volume)
Pressure at the nozzle	100 to 200 bar
Nozzle opening	0,017 to 0,021 inch

For more specific and detailed recommendations concerning the application of Alu ZM, please contact the Zingametall representative. For detailed information about the health and safety hazards and precautions for use, please refer to the Alu ZM **safety data sheet**.

Waiver*

* The information on this sheet is merely indicative and is given to the best of our knowledge based on practical experience and testing. The conditions or methods of handling, storage, use or disposal of the product cannot be controlled by us and are therefore outside our responsibility. For these and other reasons we retain no liability in case of loss, damage or costs that are caused by or that are linked in any way to the handling, storage, use or disposal of the product. Any claim concerning deficiencies must be made within 3 months upon reception of the goods quoting the relevant batch number. We retain the right to change the formula if properties of the raw material are changed. This data sheet replaces all former specimens.



ALUFER N

ZM-RE-PRO-04-A (01/08/06)

Alufer N is a moisture curing one pack polyurethane. Micaceous iron oxides create the special lamellar structure which create a very tight paint film

→ excellent water and corrosion resistance.

Alufer N can be applied as an intermediate and/or topcoat on Zinga.

Alufer N can be used for immersion in water, sea water and several chemicals.

Physical data and technical information

- **Wet product**

Components	- micaceous iron oxides - aluminium silicates - magnesium silicates
Binder	moisture curing aromatic polyisocyanate prepolymers.
Density	1,52 Kg/L (± 0,05 Kg/L) at 20°C
Solid content	- 79% by weight (± 2%) - 66% by volume (± 2%)
Viscosity	105 KU (± 5 KU) at 20°C
VOC	300 g/L (= 198 g/Kg)

- **Dry film**

Colour	Grey
Gloss	Mat

- **Packing**

1 L	available (per box of 6 L)
4 L	available
20 L	available

- **Conservation**

Storage	2 years in the original, unopened package stored in a dry environment at temperatures between -20°C and +40°C.
---------	--



Application data

• Surface preparation

When the waiting time between the successive coats is abnormally prolonged or in extremely polluted areas, the primed surface can become contaminated. All contamination that hampers the adhesion of the paint should be removed by appropriate means.

Surfaces contaminated with oil and grease should be washed down with solvent, alkaline solutions or emulsifier.

Salt deposits or other water-soluble contaminations should be removed with water and brush, water under high pressure or steam. Possible white zinc rust on zinc dust primers should be removed with water and rigid nylon brush.

• Coverage and consumption

Theoretical coverage	- for 80 µm DFT: 7,5 m ² /L - for 100 µm DFT: 6,0 m ² /L - for 150 µm DFT: 4,0 m ² /L
Practical coverage	depends upon the roughness profile of the substrate and the application method

• Environmental conditions during application

Ambient temperature	- minimum 0°C - maximum 35°C
Relative humidity	- minimum 30% - maximum 98%
Surface temperature	- minimum 3°C above the dew point

• Drying process and overcoating

Drying time	for 80 µm DFT at relative humidity of 75%: - 10°C: dustdry: 2,5 hours tackfree: 4 hours dry: 6 hours - 20°C: dustdry: 1 hours tackfree: 2,5 hours dry: 4 hours - 30°C: dustdry: 40 minutes tackfree: 1,5 hours dry: 3 hours
Overcoating	for 80 µm DFT at relative humidity of 75%: 10°C: minimum: 24 hours maximum: 3 months 20°C: minimum: 6 hours maximum: 1 month 30°C: minimum: 4 hours maximum: 1 week Remark: At longer intervals a good cleaning is necessary to avoid intermediate coat contamination which could disturb the adherence of the next coat.



Instructions for use

- **Application by brush and roller**

Dilution	5 to 10% with Zingasolv
----------	-------------------------

- **Application by spraying with air**

Dilution	10 to 20% with Thinner 41
Pressure at the nozzle	3 to 5 bar
Nozzle opening	1,2 to 1,5 mm

- **Application by airless spraying**

Dilution	5 to 15% with Thinner 41
Pressure at the nozzle	100 to 300 bar
Nozzle opening	0,017 to 0,024 inch

- **Remarks**

Stripe coat	It is always recommended to treat corners, sharp edges, bolts and nuts before applying a uniform coat.
Layer thickness	Recommended: 60 to 100 µm Maximum: 120 to 160 µm
Cleaning	With Zingasolv

For more specific and detailed recommendations concerning the application of Alufer N, please contact the Zingametall representative. For detailed information about the health and safety hazards and precautions for use, please refer to the Alufer N **safety data sheet**.

Waiver*

* The information on this sheet is merely indicative and is given to the best of our knowledge based on practical experience and testing. The conditions or methods of handling, storage, use or disposal of the product cannot be controlled by us and are therefore outside our responsibility. For these and other reasons we retain no liability in case of loss, damage or costs that are caused by or that are linked in any way to the handling, storage, use or disposal of the product. Any claim concerning deficiencies must be made within 3 months upon reception of the goods quoting the relevant batch number. We retain the right to change the formula if properties of the raw material are changed. This data sheet replaces all former specimens.